

RE-SIZEABLE AUTONOMOUS CLEANING ROBOT

A PROJECT REPORT

Submitted in partial fulfilment for the award of the degree of

Bachelor of Technology

in

Mechanical Engineering

By

SAHIL T CHAUDHARY – 18BME0668

KAHAAN PATEL – 18BME0691

MEHUL CHAURASIA – 18BME0640

School of Mechanical Engineering



VIT[®]
Vellore Institute of Technology
(Deemed to be University under section 3 of UGC Act, 1956)

April 2022

DECLARATION BY THE CANDIDATE

I hereby declare that the project report entitled “**RE-SIZEABLE AUTONOMOUS CLEANING ROBOT**” submitted by me to Vellore Institute of Technology University, Vellore in partial fulfilment of the requirement for the award of the degree of **Bachelor of Technology in Mechanical Engineering** is a record of bonafide project work carried out by me under the supervision of **Dr. Chinmay Sahu**. I declare that this report represents my concepts written in my own words and where others' ideas or words have been included, I have adequately cited and referenced the original sources. I further declare that I have adhered to all principles of academic honesty and integrity and have not misrepresented or fabricated or falsified any idea/data/fact/source in my submission. I understand that any violation of the above will be cause for disciplinary action by the Institute and can also evoke penal action from the sources which have thus not been properly cited or from whom proper permission has not been taken when needed. Further I affirm that the contents of this report have not been submitted and will not be submitted either in part or in full, for the award of any other degree or diploma and the same is certified.



Place: Vellore

Signature of the Candidate(s)

Date: 29th April 2022



VIT[®]
Vellore Institute of Technology
(Deemed to be University under section 3 of UGC Act, 1956)

School of Mechanical Engineering

BONAFIDE CERTIFICATE

This is to certify that the project report entitled “**RE-SIZEABLE AUTONOMOUS CLEANING ROBOT**” submitted by **Sahil T Chaudhary (18BME0668)**, **Kahaan Patel (18BME0691)** and **Mehul Chaurasia (18BME0640)** to Vellore Institute of Technology University, Vellore, in partial fulfilment of the requirement for the award of the degree of **Bachelor of Technology in Mechanical Engineering** is a record of bona fide work carried out by him/her under my guidance. The project fulfils the requirements as per the regulations of this institute and in my opinion meets the necessary standards for submission. The contents of this report have not been submitted and will not be submitted either in part or in full, for the award of any other degree or diploma and the same is certified.

Project Guide

Head of the Department

Internal Examiner

External Examiner

ACKNOWLEDGEMENT

We, Sahil T Chaudhary, Kahaan Patel and Mehul Chaurasia would like to thank Dr. Chinmaya Sahu for his valuable guidance throughout the course of this project.

We would also like to give a special thanks to Mukul Ganwal for his support throughout the project.

Place : Vellore



(Name of the Student)

Date : 29th April 2022

TABLE OF CONTENTS

CHAPTER NO.	TITLE	PAGE NO.
	EXECUTIVE SUMMARY	i
	LIST OF TABLES	ii
	LIST OF FIGURES	iii
	LIST OF SYMBOLS AND ABBREVIATIONS	vi
1	INTRODUCTION AND LITERATURE REVIEW	1
	1.1 INTRODUCTION	1
	1.2 LITERATURE REVIEW	2
	1.3 GAPS IN LITERATURE	6
	1.4 BACKGROUND	6
	1.5 POST/ RELATED WORK	6
	1.6 PROBLEM STATEMENT	6
	1.7 MOTIVATION	7
	1.8 CHALLENGES	7
	1.9 ESSENCE OF YOUR APPROACH	7
	1.10 STATEMENT OF ASSUMPTION	8
	1.11 ORGANIZATION OF THE REPORT	8
	1.12 AIMS AND OBJECTIVES	8
2	METHODOLOGY AND EXPERIMENTAL WORK	9
	2.1 GANTT CHART (PHASES OF THE PROJECT)	9
	2.2 MILESTONES IN THE PROJECT	9
	2.3 FUNCTIONAL COMPONENTS	10
	2.3.1 LIDAR	10

	2.3.2 Mecanum Wheels	10
	2.3.3 Camera	11
	2.3.4 Raspberry Pi	11
	2.3.5 Battery Pack	11
	2.3.6 IMU	11
	2.3.7 Wheel Motor	11
	2.3.8 Ball Screw Actuator	12
	2.3.9 Chassis Material	12
	2.4 WORK CARRIED OUT	12
	2.5 FUNCTIONAL ARCHITECTURE	13
	2.6 PROCESS FLOW CHART	14
	2.7 CIRCUIT DIAGRAM	15
	2.8 SIMULATION PROCESS FLOWCHART	16
	2.9 ULTRASONIC SENSOR CIRCUIT	17
	2.10 WHEEL MOTORS CIRCUIT	18
	2.11 LINEAR ACTUATOR CIRCUIT	18
	2.12 SENSOR CODING	19
	2.13 DESIGN CALCULATIONS	22
	2.14 VACUUM SYSTEM CALCULATIONS	23
	2.15 BATTERY LIFE CALCULATIONS	24
	2.16 COMPONENTS	25
	2.17 DESIGN PROTOTYPE (REVIEW 1)	33
	2.18 CAD DESIGN	35
	2.19 FINAL MODEL	41
3	RESULTS AND DISCUSSION	45

	3.1 SIMULATION	47
	3.2 FUNCTIONAL PROTOTYPE	49
	3.3 STRESS ANALYSIS	
4	CONCLUSIONS	50
	REFERENCES	51
	PUBLICATION COMMUNICATION	55
	PLAGIARISM REPORT	56
	CONTRIBUTION STATEMENT	60
	PROGRAMME OUTCOMES ATTAINED	61

EXECUTIVE SUMMARY

Cleaning robots have advanced significantly in recent years, owing to increased market presence and the demand for improved cleaning performance. However, due to geometric restrictions of the platforms in relation to the cleaning stage, as well as furniture and architecture, most robots have difficulty covering the whole cleaning area. The robot developed in this project uses the on-board sensors which include ultrasonic sensors to detect obstacles and change the robot configuration accordingly and to navigate forward and backward and even sideways with the help of Mecanum wheels. Ball screw linear actuation mechanism has been used to change the length of the robot according to what it maps about the local terrain using the sensors. For this purpose, a precise CAD model has been designed with the decided parameters to bring down the cost of making the cleaning robot to the bare minimum while also optimizing its cleaning efficiency at the same time. A functional prototype has also been developed as a proof of concept and it has been compared with a simulation study done in CoppeliaSim software.

The robot consists of three separate compartments. The two side compartments slide in and out of the middle compartment with the help of Ball Screw Linear Actuators. This is the essence of the resizing system that has been developed. This enables the robot to increase its size when necessary to increase the swept area, and also decrease its size in order to reach more inaccessible areas. Having decided on the components required to ensure the optimal performance of the system, a CAD model has been developed to illustrate the design of the robot. Further, a Simulation study has been conducted to demonstrate the efficacy of the system. Since a Simulation environment comprises ideal scenarios, a Functional Prototype has also been developed as a proof of concept to demonstrate and test the system in the real world. The design of the chassis of the robot posed several challenges, as the basic structure of the robot comprising three separate compartments came with its own set of challenges. The weight of the various components induced bending stresses on the chassis, and led to a loss of traction to the wheels. Hence, multiple iterations of the chassis had to be developed before satisfactory performance was achieved.

The Simulation study and the Functional Prototype, along with the various minor intricacies have been elaborated in this report.

LIST OF TABLES

Table No.	Title	Page No.
Table 2.1	List of Components	26
Table 3.1	Properties of MS	47

LIST OF FIGURES

Figure No.	Title	Page No.
Fig. 1.1	A Floor Cleaning Robot	2
Fig. 2.1	Gantt Chart	9
Fig. 2.2	Functional Architecture	13
Fig. 2.3	The Robot's Process Flowchart	14
Fig. 2.4	Circuit Diagram	15
Fig. 2.5	Simulation Process Flowchart	16
Fig. 2.6	Ultrasonic Sensor Circuit	17
Fig. 2.7	Wheel Motors Circuit	18
Fig. 2.8	Linear Actuator Circuit	18
Fig. 2.9	Ultrasonic Sensor Code	19
Fig. 2.10	Ultrasonic Sensor Code contd.	20
Fig. 2.11	Main Script	21
Fig. 2.12	Main Script contd.	21
Fig. 2.13	RPLIDAR A1	26
Fig. 2.14	Mecanum Wheel	27
Fig. 2.15	Vacuum Pump Characteristic	27
Fig. 2.16	Vacuum Pump	27
Fig. 2.17	Vacuum Pump Sketches	27
Fig. 2.18	Battery	28
Fig. 2.19	DC Motor	28
Fig. 2.20	Motor Driver	29
Fig. 2.21	Raspberry Pi 4	29
Fig. 2.22	Pi Camera	30

Fig. 2.23	IMU	30
Fig. 2.24	Ball Screw Actuator	31
Fig. 2.25	DC/DC Converters	31
Fig. 2.26	HC-SR04 Ultrasonic Sensor	32
Fig. 2.27	Front View (Design Prototype)	33
Fig. 2.28	Side View (Design Prototype)	33
Fig. 2.29	Top View (Design Prototype)	34
Fig. 2.30	Isometric View (Design Prototype)	34
Fig. 2.31	Main Box	35
Fig. 2.32	Left Box	36
Fig. 2.33	Right Box	37
Fig. 2.34	LIDAR CAD Model	37
Fig. 2.35	Mecanum Wheel CAD Model	38
Fig. 2.36	Vacuum Pump CAD Model	38
Fig. 2.37	Battery CAD Model	38
Fig. 2.38	DC Motor CAD Model	39
Fig. 2.39	Raspberry Pi 4 CAD Model	39
Fig. 2.40	Pi Camera CAD Model	40
Fig. 2.41	Ball Screw Actuator CAD Model	40
Fig. 2.42	Ball Screw Actuation Mechanism	40
Fig. 2.43	Isometric View (CAD)	41
Fig. 2.44	Front View (CAD)	41
Fig. 2.45	Side View (CAD)	41
Fig. 2.46	Top View (CAD)	42
Fig. 2.47	Bottom View (CAD)	42
Fig. 2.48	Back View (CAD)	42

Fig. 2.49	Maximum Length (CAD)	43
Fig. 2.50	Minimum Length (CAD)	43
Fig. 3.1	Simulation	45
Fig. 3.2	Length Actuation (Simulation): Fully Extended (Top) and Fully Retracted (Bottom)	46
Fig. 3.3	Functional Prototype (Fully Retracted)	47
Fig. 3.4	Functional Prototype (Fully Extended)	48
Fig. 3.5	Functional Prototype (Circuit)	48
Fig. 3.6	Stress Analysis (Fully Retracted)	49
Fig. 3.7	Stress Analysis (Fully Extended)	49

LIST OF SYMBOLS AND ABBREVIATIONS

LIDAR	Light Detection and Ranging
IR	Infrared
TOF	Time of Flight
DC	Direct Current
MHz	Mega Hertz
Amp	Ampere
Rpm	Rounds Per Minute
Ah	Ampere Hour
cm	Centimetre
GPS	Global Positioning System
RRT	Rapidly-Exploring Random Trees
PT	Pan-Tompkins
GA	Genetic Algorithm
CNN	Convolutional Neural Network
SVM	Support Vector Machine
IMU	Inertial Measurement Unit
PID	Proportional Integral Derivative
CAD	Computer Aided Design
SLAM	Simultaneous Localization and Mapping
mm	Millimetre
gm	Gram
Kg	Kilogram
MP	Mega Pixel
Wi-Fi	Wireless Fidelity
GB	Giga Byte
K	Kilo (Thousand)
HDMI	High-Definition Multimedia Interface

mAh	Milli Ampere Hour
V	Volt
mA	Milli Ampere
DOF	Degrees of Freedom
W	Watt
hrs	Hours.
URDF	Unified Robotics Description Format
GND	Ground
GPIO	General Purpose Input/Output
PWM	Pulse Width Modulation
m	Metre
μ	Coefficient of Friction
M	Mass
g	Acceleration due to Gravity
R	Radius
Nm	Newton-Metre
in	Inch
CFM	Cubic Feet per Minute
D	Diameter
C	Conductance
L	Length
A	Area
Q	Discharge
v	Velocity
m/s	Metre per Second
ft/min	Feet per Minute
ft ²	Square Feet
mins	Minutes
A	Ampere
°	Degrees

Al	Aluminium
Pa	Pascal
Li-ion	Lithium-ion
fps	Frames per Second
T	Tesla
N	Newton
kHz	Kilo Hertz
MS	Mild Steel
Kg/m ³	Kilograms/Cubic Metre
GPa	Giga Pascal
MPa	Mega Pascal
FOS	Factor of Safety

CHAPTER 1

INTRODUCTION AND LITERATURE REVIEW

1.1 INTRODUCTION

Cleaning has always been an important and necessary aspect of human lives, and it has developed and changed over time. The need for completely automated floor cleaning robots has surged as a result of today's hectic lifestyle.

Automated floor cleaning robots are commonly employed in smart homes, residential, and office spaces to clean the floors.

According to a world market study, there is a strong demand for the application of these robots in domestic settings with fully automated functionalities and the least amount of human assistance, and while these robots still account for a small percentage of the global vacuum cleaner market, their recognition and implementation is growing at a rapid rate.

The robots are small and execute the cleaning operation without the need for human participation. These robots use motion planning algorithms to cover a large area while cleaning, such as spiral motion, backtracking spiral motion, boustrophedon motion (back and forth), and basic zig-zag motion patterns.

Even though fixed-configuration robots have sufficient path planning and motion skills, they may require more time and energy to complete the complicated task effectively than their changeable counterparts. As a result, building a re-sizeable robot that can increase the swept area in open spaces, and can reduce its size to reach more inaccessible areas, can make the task more efficient. This project focuses on the design and development of the same.

A functional prototype has been developed with the decided components as mentioned and exhaustive testing and simulations on the control mechanism have also been performed for introduction to the commercial market in the later stages.



Fig. 1.1 A Floor Cleaning Robot

1.2 LITERATURE REVIEW

Prassler et al. demonstrated almost how all commercial home cleaning robots are equipped with vacuum cleaners as their primary means of cleaning. Pool cleaning robots have also been developed. Some robots also have wet scrubbers to clean the floor (non-textile floor coverings), and some also clean carpets. Some industrial robots have sweepers along with vacuum cleaners. Duct cleaning robots with rotating brushes have also been developed. Sensors that are usually employed include Ultrasonic, LIDAR, IR, Cameras and Contact. Robots are navigated using dead reckoning, manually using a joystick, or even using magnetic markers to guide the way. Safety features include front bumpers that absorb impact shock. Robot road sweepers have also been developed for cleaning large open spaces. [1]

Endres et al. developed robots for cleaning purposes in the supermarkets. There are some special features in these robots, they consist of a retractable wing which is inserted in the right part of the robot. The use of this retractable wing allows the robot to get close to the objects and precisely cleans the floor without colliding with the obstacles. Also, the size of this wing can be adjusted according to the requirement it can be extended or reduced as needed. The main features of this robot were: To identify the obstacles properly for cleaning the environment, executing the plan properly, no need to install any additional part to localize the robot, a systematic skill to move around the obstacles for least energy consumption. [2]

Kushal et al. have worked on a cleaning robot ATMEGA 2560 which worked with two modes: automatic and manual. The hardware used were Arduino Mega 2560, Ultrasonic Sensor, DC Generated Motor, Vacuum Motor, L298n Dual H-Bridge Motor Driver, VL53LOX Laser TOF Sensor and Servo Motor. Since the robot has two modes, one of them is manual mode which is selected when the robot switch is high and allows the users to reach places which are not automatically detected by the robot. And for the autonomous mode there is an algorithm which

is followed by the robot with path planning. There is also a water sprayer attached so that the robot can also be used for the mopping purposes as for the convenience of the user. [3]

Sewan Kim et al. demonstrated the Roboking system integration in an autonomous cleaning robot. The purpose of this robot was the protection of the indoor cleaning environment while the robot is working. There are many different sensors and the functions which are integrated in this system. The robot uses a digital signal processor from Texas Instruments (320LF 2406A). It works on 40MHz frequency with 24 sensors performing the operations together gathering different signals from internal subsystems. Also, there are 14 ultrasonic sensors which are installed in the robot, where nine of them were used in the lower part to find the obstacles. And the others were used on the upper part so that the robot does not collide with the tall obstacles. For the Roboking mechanism, there are cliff detecting sensors which determine the upliftment of the robot and prevent the robot from falling down. [4]

Liu et al. developed a system that did not rely on mapping and global self-localization. It consists of three layers. The lowest layer contains the sensors and hardware, which include ultrasonic (13 pairs, 7 for the front and the rest for the sides), IR, encoders, DC motors, vacuum etc. The second layer is responsible for the behaviour of the robot, which include point turning, line following, wall following, side shifting, and obstacle rounding. The third layer is responsible for carrying out tasks, like environment learning, cleaning and homing. [5]

Mahmud Hasan et al. demonstrated the use of bumper contact sensors and cliff IR sensors. The path planning algorithms include Random walk, spiral, 'S'-shaped path and wall follow. These four algorithms are cycled between until the entire area is covered. The motor specification is 2Amp/6VDC, 5500 rpm with 70:1 gearbox for the driving wheels. The side brush controlling motor specification is 0.5Amp/6VDC with a 30:1 gearbox. The vacuum motor is 5Amp/6VDC with 8000rpm (Cyclonic type dry vacuum is used). The battery used is 6V/4.5Ah lead-acid. The robot can operate for an hour. The battery takes 5-6 hours to charge. [6]

Joon et al. developed a combination of Lidar and camera. A manipulator arm containing the vacuum was attached to the mobile robot. The collector box has a volume of 378 cubic cm ($10\text{ cm} \times 6\text{ cm} \times 6.3\text{ cm}$). [7]

Shakhawat Hossen et al. discussed how LIDAR and GPS have been used for mapping and localization. IR proximity sensors and ultrasonic sensors were used for object detection. [8]

Gerstmayr-Hillen et al. discussed how an omnidirectional camera was used to generate panoramic images of the environment in order to map it, and hence guide and navigate the robot to cover a rectangular segment of the robot's workspace. The omnidirectional camera is used to simultaneously localize the robot and also map the environment. Hence, the camera carries out local visual homing and provides the data to generate a dense topological map. The robot is guided along parallel paths by controlling its distance from the previous lane. The distance is estimated using images from the camera and the robot's odometry. Only the robot's distance from the previous lane and its orientation are calculated. [9]

Karur et al. discussed various path planning algorithms. Dijkstra and A* algorithms are used for static environments, whereas D*RRT (Rapidly-Exploring Random Trees), Genetic, Ant Colony and Firefly algorithms are used for Dynamic environments. [10]

Dakulovic et al. demonstrated complete coverage of D* algorithm for path planning, using a combination of D* and PT algorithms. [11]

Lamini et al. demonstrated how GA (Genetic Algorithm) with improved crossover operators and fitness functions were employed to find optimal solutions. [12]

Amine Yakoubi et al. demonstrated that GA was used for path planning. Each gene represents the robot position and the chromosomes represent the mini-path. [13]

Liu et al. developed an algorithm for complete coverage path planning, which combines random path planning and local complete coverage path planning. Random path planning is very flexible for unstructured environments, but is inefficient. On the other hand, local complete coverage path planning generates a comb-like path to cover a relatively small area with high efficiency, but fails to do so in a larger area in an unstructured and dynamic environment. The proposed technique combined the benefits of both. 11 pairs of ultrasonic sensors were used, 7 for the front and the rest for the sides. [14]

Hofner et al. demonstrated path planning of a rectangular non-holonomic robot. Two changing manoeuvres were used to navigate the robot – U-Turn and Side-Shift. Based on the parameters of the robot and the environment, the path planning algorithm will choose the most appropriate path planning template such that the entire floor area is covered efficiently. Localization was done using ultrasonic sensors and dead-reckoning. Subgoals were determined in the vicinity of various pre-planned landmarks. Vehicle guidance was done by finding the specified start location and compensation of path errors. [15]

Ramalingam et al. developed an algorithm for detecting and classifying debris as solid and liquid spillage using CNN and SVM was developed. This helped the robot to avoid hard to clean debris, as robots are mostly unable to clean such debris and hence end up spreading them on the floor rather than cleaning it, thus also reducing their efficiency. [16]

Schmidt et al. developed an algorithm that has been developed to memorize uncleaned areas that couldn't be cleaned in the first sweep because of a temporary obstacle, and then come back to clean it after the remaining area has been cleaned. [17]

Parween et al. developed a self-reconfigurable robot called hTrihex has. It enables the robot to cover spaces that are generally missed or inaccessible by the usual circular shaped cleaning robots (like corners). This robot can configure itself into three different configurations based on the requirements, namely – Straight, Chevron and Closed. The sensors used onboard are encoders, LIDAR and IMU, along with a PID controller for implementing a closed-loop system. A differential drive has been implemented to steer the robot and hence control the heading. [18]

Parween et al. developed another similar self-reconfigurable robot is the hTetrakis. It consists of four equilateral triangles, and can change between three configurations namely – “I”, “A”, and “U” shapes. These configurations enable the robot to access convex and narrow corners that are generally inaccessible by the common circular shaped cleaning robots. [19]

Forlizzi et al. demonstrated that Mecanum wheels have their omnidirectional property that allow them to have excellent manoeuvrability and ability to move in a congested space. Congested spaces usually mean environments with static or dynamic obstacles or narrow areas respectively. Due to the Mecanum wheel's high manoeuvrability, it is ideal for outdoor applications like transportation purposes in warehouses, mining activities and even for military activities and indoor applications like autonomous robot cleaning that is the objective of this Capstone project. [20]

Laurena et al. developed and demonstrated control mechanism for actuating ball screw linear actuator. A ball screw linear actuator converts rotatory motion to linear motion. It has low friction and can withstand thrust loads. The programming and control system for the linear actuator was developed. [21]

Bhowmik et al. developed an algorithm for navigation of a cleaning robot by modifying the Dijkstra algorithm. A provision for backtracking and hill climbing were incorporated. This improved the performance of the Dijkstra algorithm. [22]

1.3 GAPS IN LITERATURE

After the exhaustive literature review it has been concluded that,

1. According to the literature review conducted, all the cleaning robots including the commercially available ones, are fixed in size and configuration.
2. A handful of self-reconfigurable robots have been developed. The objective of these robots is to cover hard-to-reach places, that conventional fixed configuration robots cannot.
3. Hence, the aim is to develop a re-sizeable robot that can increase its length to cover more area in a single sweep, and can also reduce its size to reach inaccessible areas.

1.4 BACKGROUND

The cleaning task is an essential one, and as a result, floor cleaning robots are gaining popularity. However, all the commercially available cleaning robots are of a fixed configuration. Hence, the cleaning task can be improved upon and made more efficient. A re-sizeable robot can help achieve the same.

1.5 POST/ RELATED WORK

Almost all the robots covered in the literature review are fixed in size and configuration. A handful of the cleaning robots reviewed are re-configurable. Re-configurable robots have the advantage of reaching inaccessible areas and hence lead to more efficient cleaning. A re-sizeable robot has similar advantages, along with the added benefit of increasing its size for a more efficient clean.

1.6 PROBLEM STATEMENT

Cleaning robots are available in a variety of sizes and can clean a specific area in a single sweep. However, the cleaning efficiency and effectiveness can be improved. In open places

with little impediment, such as broad halls and living rooms, cleaning can be done quickly by sweeping a larger area in a single sweep. To address this problem, a re-sizeable cleaning robot is being developed that can extend its length, allowing it to cover a larger area in a single sweep, and can also reduce its size to reach inaccessible areas.

1.7 MOTIVATION

The motivation for the project was to reduce the amount of manual labour involved in cleaning an area and especially surfaces that are out of physical reach and to also reduce the amount of physical stress caused. The cleaning robot includes built-in sensors that can detect areas of home that require special attention and perform additional runs over them. High-traffic areas, such as hallways, entryways, mudrooms, and playrooms, will receive cleaning care. Due to the efficiency of the design and the sensors, the robot can work on any type of surface after receiving the necessary information from the surroundings.

1.8 CHALLENGES

The most challenging aspect has been the design of the chassis for the Functional Prototype. Having chosen sheet metal, the major problem that had arisen involved the bending of the chassis and subsequent loss of traction to the wheels. Choosing a thickness for the sheet involved creating a balance between rigidity and weight. Finally, an MS sheet of 1 mm thickness proved to be satisfactory.

Another noteworthy challenge has been the consideration of intricate details while developing the CAD model. Considering the complexity of the robot, several complications and challenges emerged during development.

1.9 ESSENCE OF YOUR APPROACH

The approach to the development of the robot involved defining a clear problem statement and designing the robot along with its functional architecture. Having done that, a detailed CAD model has been developed along with selection of the various components of the robot. Further, a Simulation study along with a Functional Prototype has been developed to demonstrate the effectiveness of the system.

1.10 STATEMENT OF ASSUMPTION

The robot has been developed assuming that standard elements such as LIDAR, Ultrasonic sensors and camera will work as expected and will not be affected by the re-sizing aspect of the robot. Although vacuum calculations have been conducted, it has been completely theoretical. Real life performance may vary, and hence it has been assumed that a vacuum pump of sufficient capacity will function satisfactorily, and will not fail in picking up dust particles despite the increase in the vacuum system orifice.

1.11 ORGANIZATION OF THE REPORT

The various intricacies related to the development of the robot have been covered in the report. The functional architecture, process flow charts, circuit diagrams and finalized components have been elaborated. Mathematical calculations related to the design and selection of components have been discussed. Finally, the Simulation study, Functional Prototype and Stress Analysis results have been showcased.

1.12 AIMS AND OBJECTIVES

1. To design a system that can change the length of the robot depending on the need and area that is currently being cleaned.
2. To integrate an actuation mechanism for changing the length.
3. To integrate object detection using camera and/or ultrasonic sensors.
4. To conduct a Simulation study.
5. To develop a Functional Prototype as a proof of concept.

CHAPTER 2

METHODOLOGY AND EXPERIMENTAL WORK

2.1 GANTT CHART (PHASES OF THE PROJECT)

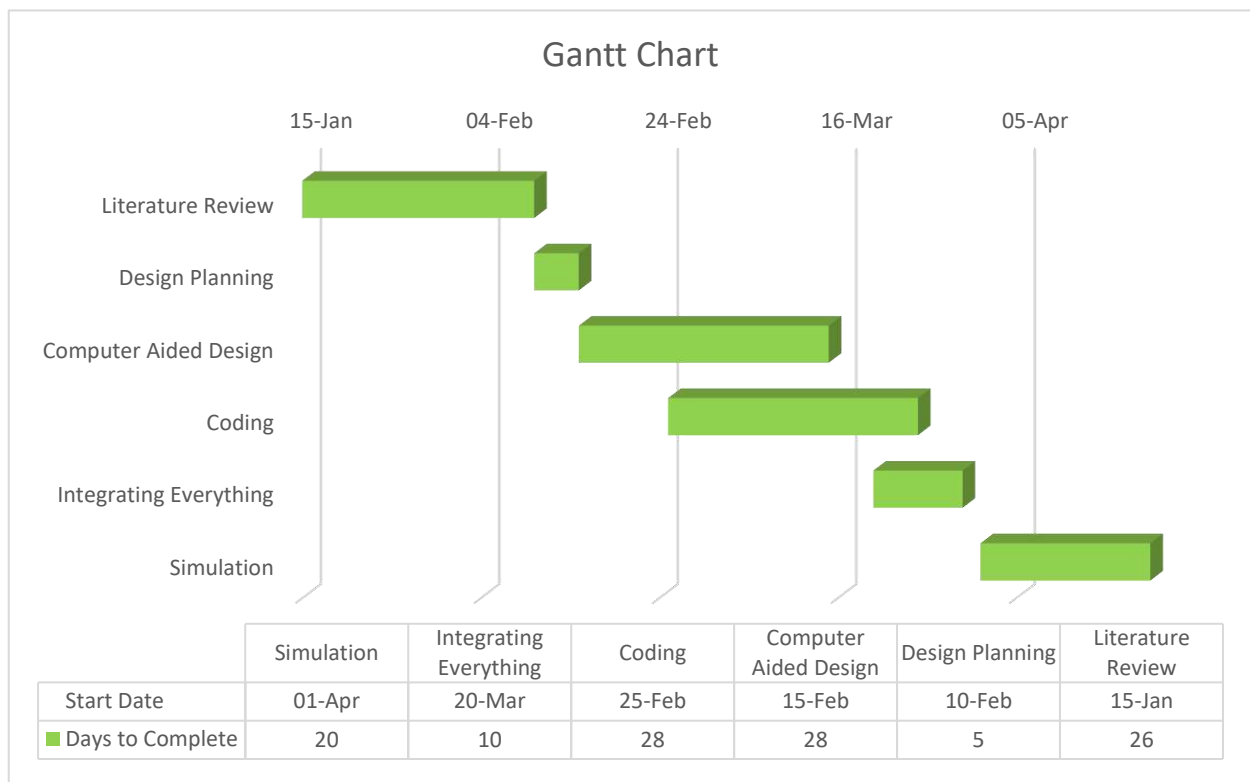


Fig. 2.1 Gantt Chart

2.2 MILESTONES IN THE PROJECT

1. Completion of Chassis Design
2. Development of CAD Design for Actuation Mechanism
3. Development of Path Planning Algorithm
4. Development of Object Detection Algorithm
5. Development of the control system to actuate the Ball Screw Linear Actuator used to change the size of the robot
6. Conduction of Simulation study
7. Development of Functional Prototype

2.3 FUNCTIONAL COMPONENTS

The theoretical design of the robot, as well as the basic components needed, have been finalised after extensive study and detecting gaps in the literature review, as well as recognising scope for improvement. The CAD model has been developed, based on the mathematical calculations and finalised components. The on-board sensors include LIDAR and camera to detect obstacles and change the robot configuration accordingly. The following steps include programming the robot's many functions like the ability to change its length according to the environment and conducting simulations like controlling the size of the robot and the ability of the robot to manoeuvre with the help of Mecanum wheels. The primary components that have been used are:

2.3.1 LIDAR – LIDAR (Light Detection and Ranging) is a remote sensing technique that measures ranges (varying distances) to the obstacle using light in the form of a pulsed laser.

The aim is to use RPLIDAR A1 which integrates the concept of SLAM (Simultaneous Localization and Mapping). RPLIDAR A1 is a laser triangulation range system that employs Slamtec's high-speed vision acquisition and processing hardware. The technology takes distance measurements at a rate of around 8000 times per second. RPLIDAR A1's core rotates clockwise to perform 360-degree omnidirectional laser range scanning for its surrounding surroundings and then build an outline map.

2.3.2 Mecanum Wheels – Mecanum wheels have their omnidirectional property that allow them to have excellent manoeuvrability and ability to move in a congested space. Congested spaces usually mean environments with static or dynamic obstacles, or with narrow areas.

The aim is to use a set of bush type aluminium Mecanum wheels with the following specifications:

- i) Diameter: 60 x 31 mm (Diameter x Width)
- ii) Body Material: Aluminium Alloy
- iii) Roller Material: Hard Rubber
- iv) Length of Roller: 30 mm

- v) Net Weight: 93 gm (Each)
- vi) Load Capacity: 3Kg/Wheel

2.3.3 Camera – The aim is to use a camera sensor for object detection so as to facilitate the cleaning robot to make its own autonomous decision. The objective is to use the Raspberry PI 5MP Camera Board Module. It will also enable a live video feed to be transmitted to any device via Wi-Fi or Bluetooth.

2.3.4 Raspberry Pi – The aim is to use Raspberry Pi 4 microprocessor as it is easier to integrate it with the SLAM based RPLIDAR A1 so as to facilitate smoother mapping of the terrain. Raspberry Pi 4 will be used specifically due to its high-performance 64-bit quad-core processor, 4 GB of RAM and dual display support with resolutions up to 4K via a pair of micro-HDMI ports.

2.3.5 Battery Pack – The aim is to use two 5000mAh 22.2V battery packs with maximum discharge current and maximum charging current as 15000 mA and 5000 mA respectively. Instead of using one big 10000mAh battery, the plan is to use two 5000mAh battery connected in parallel as the voltage remains constant and increase the duration for which it could power equipment. It's important to note that when charging batteries that are connected in parallel, the increased amp-hour capacity may require a longer charge time.

2.3.6 IMU – The aim is to use MPU9250 9-Axis Attitude Gyro Accelerator Magnetometer Sensor Module with a power supply of 3.3-5 V (DC) and dimensions 22 X 17 mm with 9 DOF modules.

2.3.7 Wheel Motor – The aim is to use a compact DC Motor with High Power Density and high efficiency. The following are its characteristics:

- i) Input Voltage of 12 V (DC)
- ii) No Load Speed = 9900 rpm
- iii) Nominal Speed = 8050 rpm
- iv) Maximum Output power = 6.64 W
- v) Life (Typical) = 1000 hrs

2.3.8 Ball Screw Actuator – Ball screws are mechanical linear actuators made up of a screw shaft and a nut with a ball that rolls between helical grooves that correspond. Ball screws' main purpose is to transform rotational motion into linear motion. Ball nuts are used to transmit forces to a static or dynamic load with excellent precision, reproducibility, and accuracy. The rolling balls in the helical groove of ball screws are a unique feature that eliminates mechanical contact inside the screw assembly and replaces sliding friction with rolling friction. This technique reduces friction greatly, resulting in a very efficient power conversion. Screw efficiency is determined by their capacity to convert power used to exert rotating force into linear distance travelled.

The aim is to use ball screw linear actuators to control the size of the robot.

2.3.9 Chassis Material – A functional prototype was developed wherein mild steel sheet metal was used to construct the chassis. The reasons for using mild steel are its properties:

- i) Cost Effective
- ii) Weldable
- iii) Ductile
- iv) Can be carburised easily
- v) Recyclable

2.4 WORK CARRIED OUT

1. Literature review has been completed.
2. Problem statement defined.
3. The primary components required to make the robot have been finalised.
4. The conceptual design of the robot, including the mechanism to change its size, has been developed.
5. The Functional Architecture has been developed.
6. Mathematical analysis required for the research has been conducted.
7. A detailed CAD Model has been developed.
8. Basic Simulation study has been completed.

9. A Functional Prototype has been developed.

2.5 FUNCTIONAL ARCHITECTURE

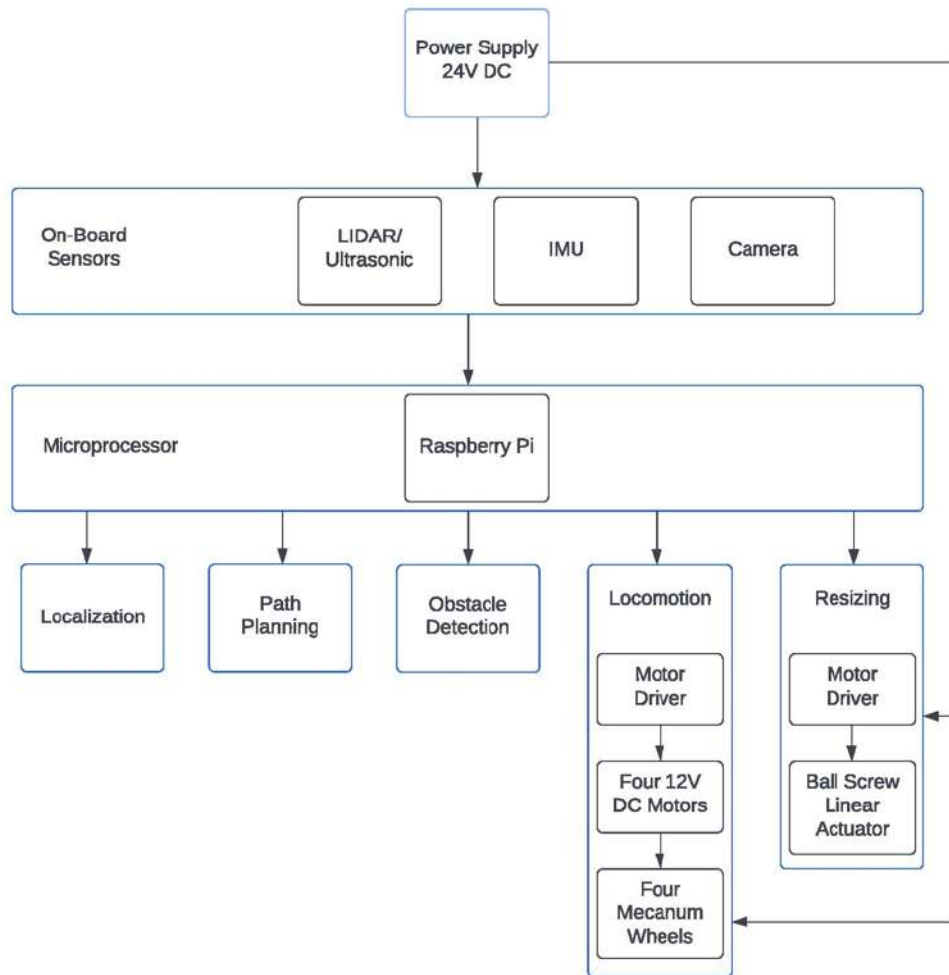


Fig. 2.2 Functional Architecture

The battery pack will power the on-board sensors, which include Ultrasonic sensors, IMU and Camera. These sensors will in turn provide input data to the Raspberry Pi, which is the microprocessor being used. The Raspberry Pi will in turn carry out and manage the various subsystems using the input data from the aforementioned sensors. The various subsystems include Localization, Path Planning, Obstacle Detection, Locomotion, and Resizing, as illustrated in Fig. 2.2.

The locomotion is carried out using four Mecanum Wheels connected to DC Motors, using a motor driver. Resizing is carried out using the Ball Screw Linear Actuator via another motor driver.

2.6 PROCESS FLOW CHART

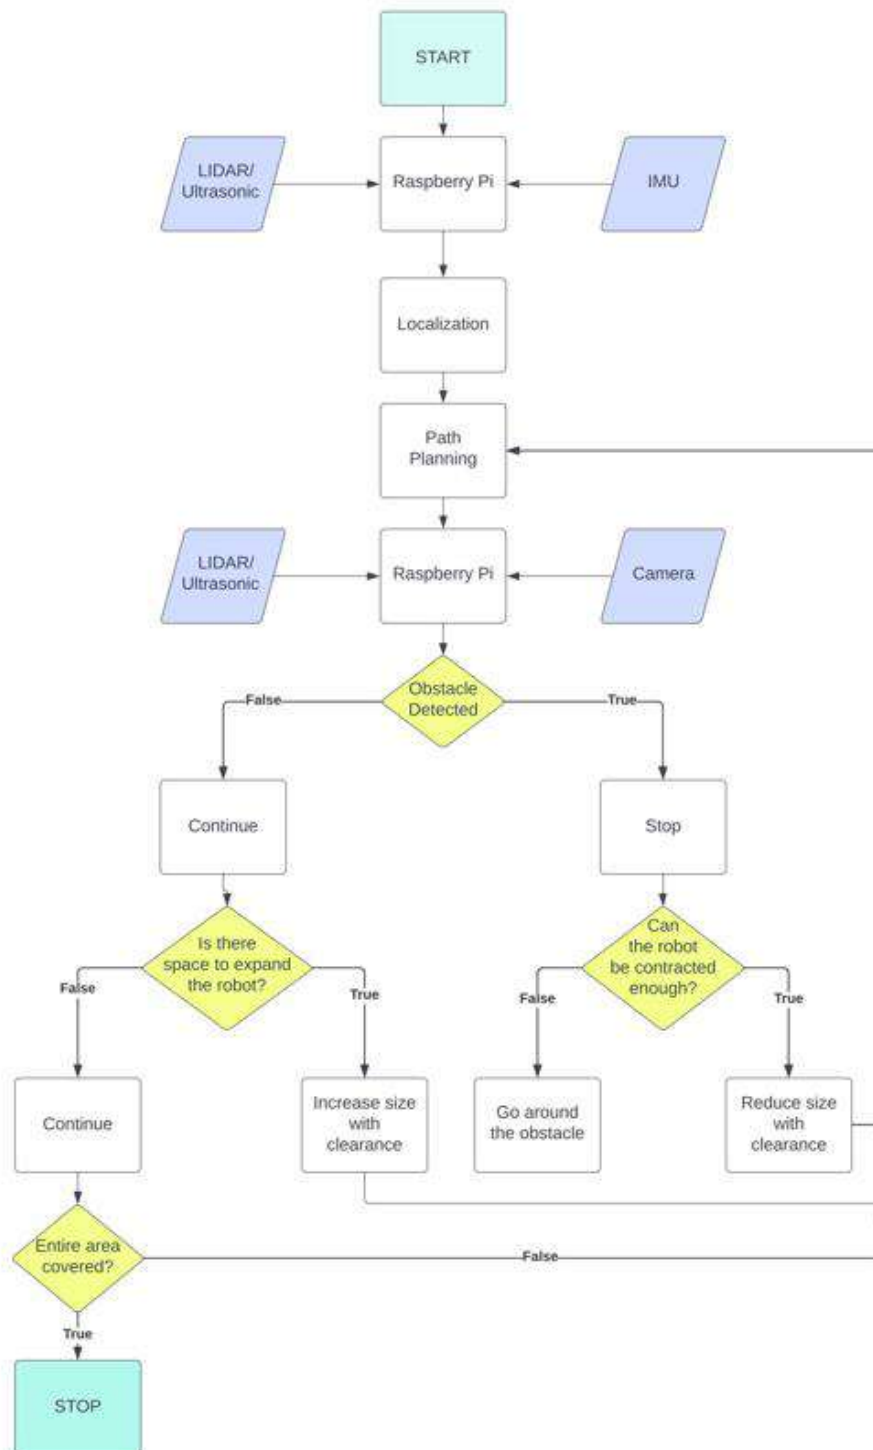


Fig. 2.3 The Robot's Process Flowchart

The robot will function based on a fixed set of logical decisions, as illustrated in Fig. 2.3, which will ensure efficient and reliable cleaning. In open spaces, the robot will try to increase its lengths as much as possible. In case there is an obstacle, it will first try to reduce its length so as to pass through the obstacle. If it is unable to do so, it will simply manoeuvre around the obstacle and continue cleaning.

2.7 CIRCUIT DIAGRAM

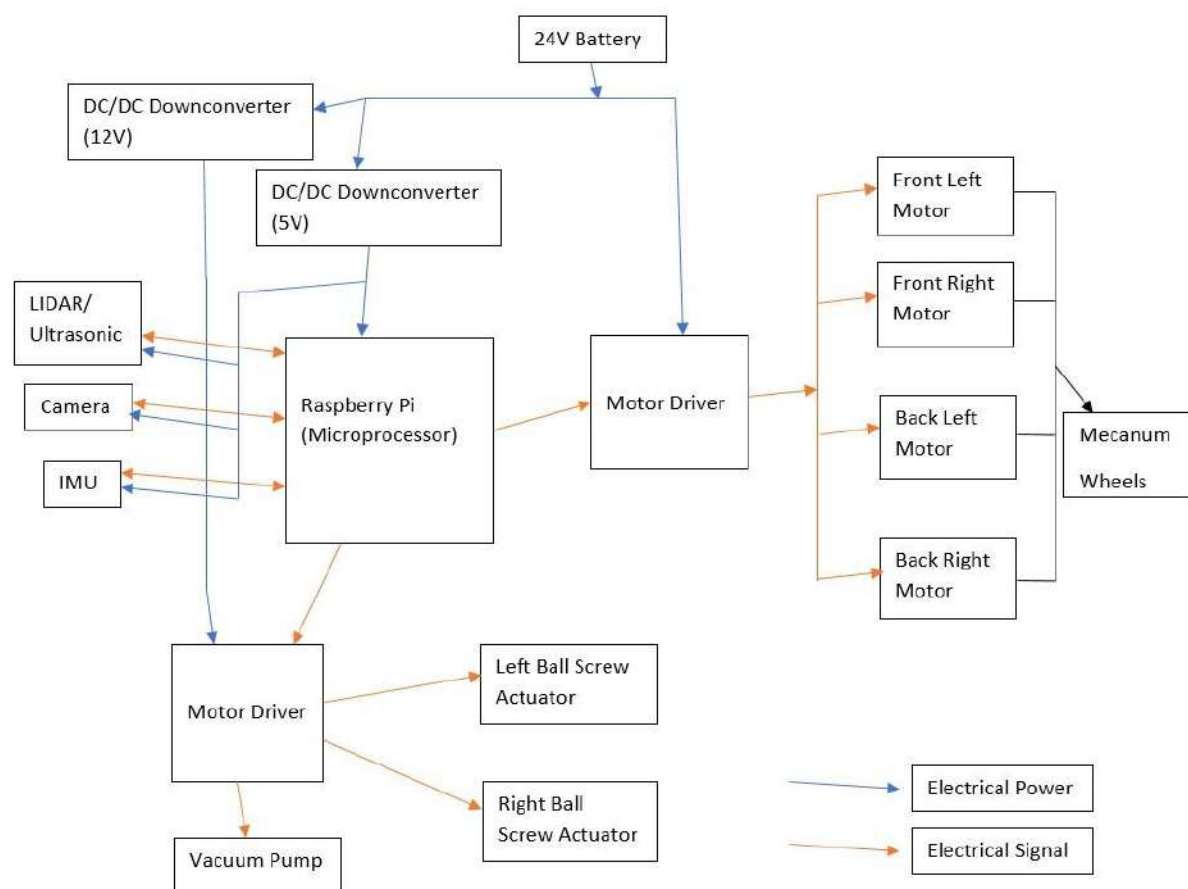


Fig. 2.4 Circuit Diagram

Fig. 2.4 illustrates the various electrical and logical connections between the various components. Logical connections are made between the Raspberry Pi and components, whereas electrical connection are made between the battery pack and components.

2.8 SIMULATION PROCESS FLOWCHART

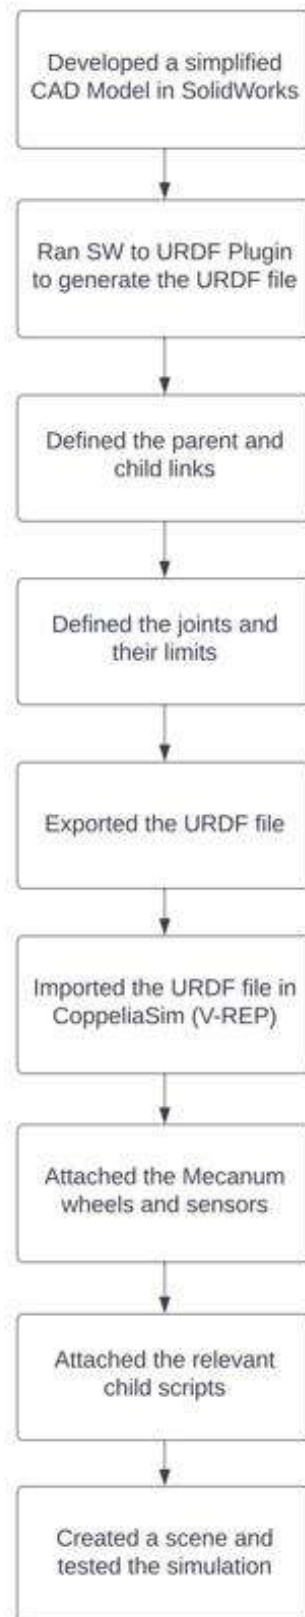


Fig. 2.5 Simulation Process Flowchart

The various steps involved in creating the Simulation study have been illustrated in Fig. 2.5. A simplified CAD model has been developed to ensure that the simulation goes smoothly. The CAD model has further been exported as a URDF file, and then imported into the simulation software. The simulation software chosen is CoppeliaSim (V-REP) because of its simplicity and familiarity with the software. Further, the joints and links have been defined, sensors integrated, and the scene set.

2.9 ULTRASONIC SENSOR CIRCUIT

The following circuit diagrams have been made using Fritzing software.

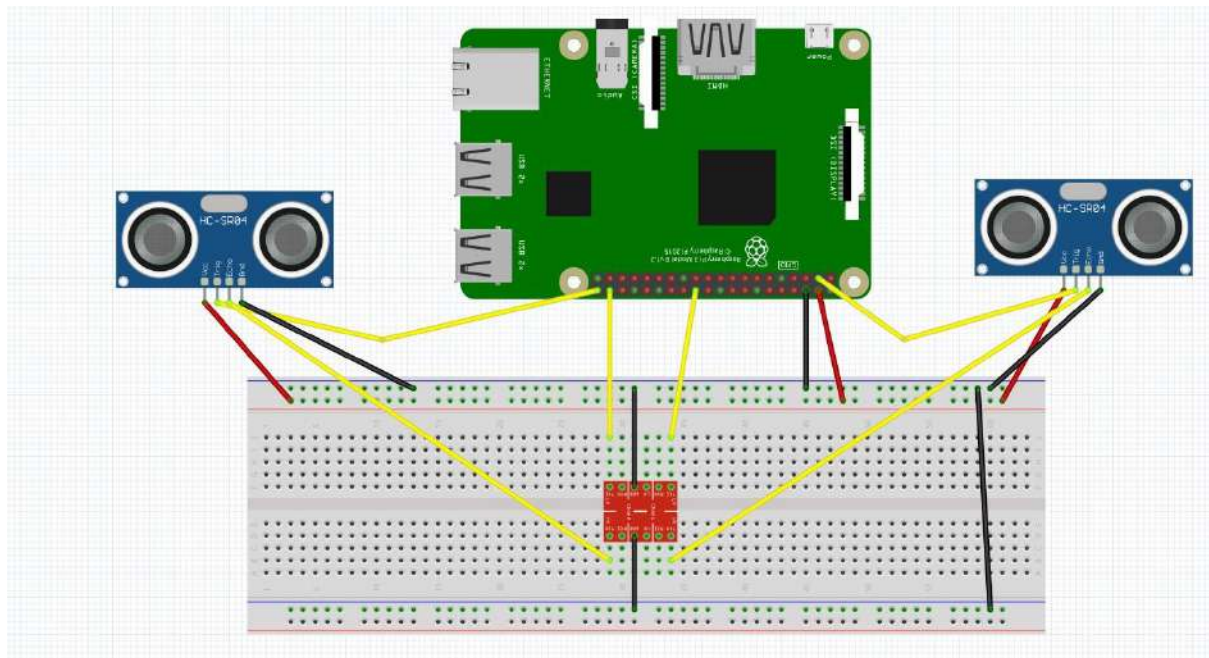


Fig. 2.6 Ultrasonic Sensor Circuit

Fig. 2.6 shows the various connections made between the Raspberry Pi and the HC-SR04 Ultrasonic sensors. The Ultrasonic sensors are powered via the +5V pins of the Raspberry Pi. The Grounds are made common. The TRIG pin of the sensor is set as an output pin, and is connected to one of the several GPIO pins of the Raspberry Pi. The ECHO pin of the sensor is set as an input pin. Since the HC-SR04 sensor functions on a 5V logic level, and the Raspberry Pi on a 3.3V logic level, connections have to be made via a 5V to 3.3V logic level shifter.

2.10 WHEEL MOTORS CIRCUIT

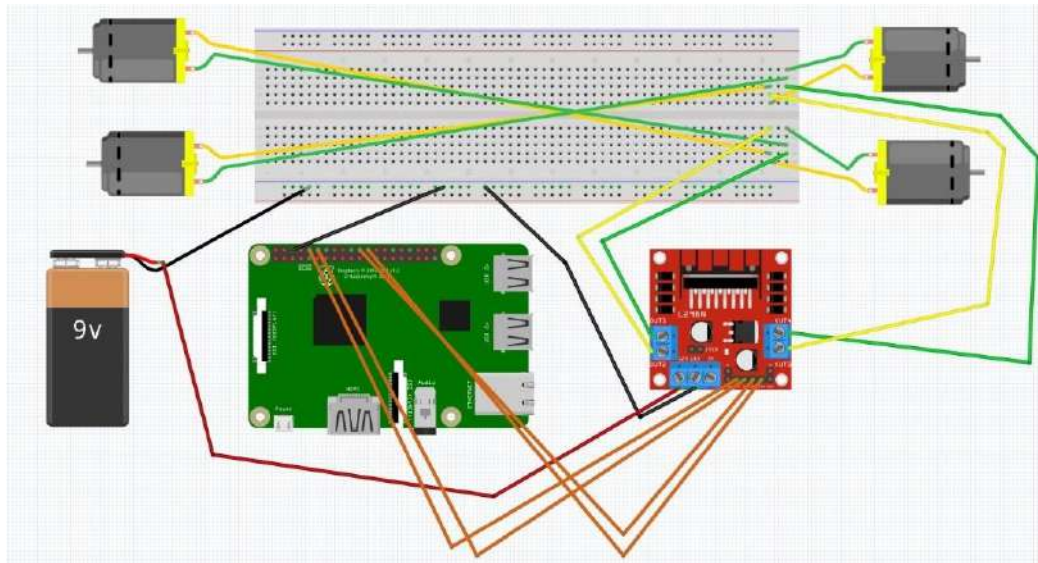


Fig. 2.7 Wheel Motors Circuit

Fig. 2.7 shows the connections between the Raspberry Pi, motors and the motor driver. Diagonally opposite motors, corresponding to the type A and type B Mecanum wheels respectively, are connected together. The positive and negative terminals are then connected to the OUT ports of the L298N motor driver. The motor driver is powered using a 12V battery via the +12V port. The Grounds are made common. Logical connections are made between the IN ports of the motor driver and the GPIO pins of the Raspberry Pi. The ENA and ENB pins of the motor driver can be used for PWM control, to control the speed of the motors.

2.11 LINEAR ACTUATOR CIRCUIT


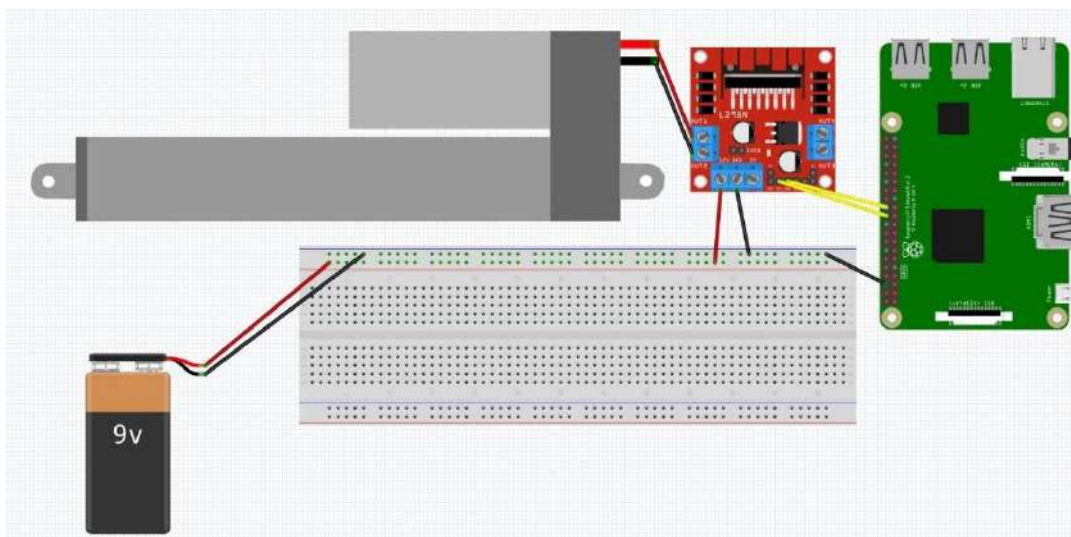


Fig. 2.8 Linear Actuator Circuit

Fig. 2.8 shows the connections between the Raspberry Pi, linear actuator and the motor driver. The positive and negative terminals of the linear actuator motor are connected to the OUT ports of the L298N motor driver. The motor driver is powered using a 12V battery via the +12V port. The Grounds are made common. Logical connections are made between the IN ports of the motor driver and the GPIO pins of the Raspberry Pi.

2.12 SENSOR CODING

2.12.1 Ultrasonic Sensor:

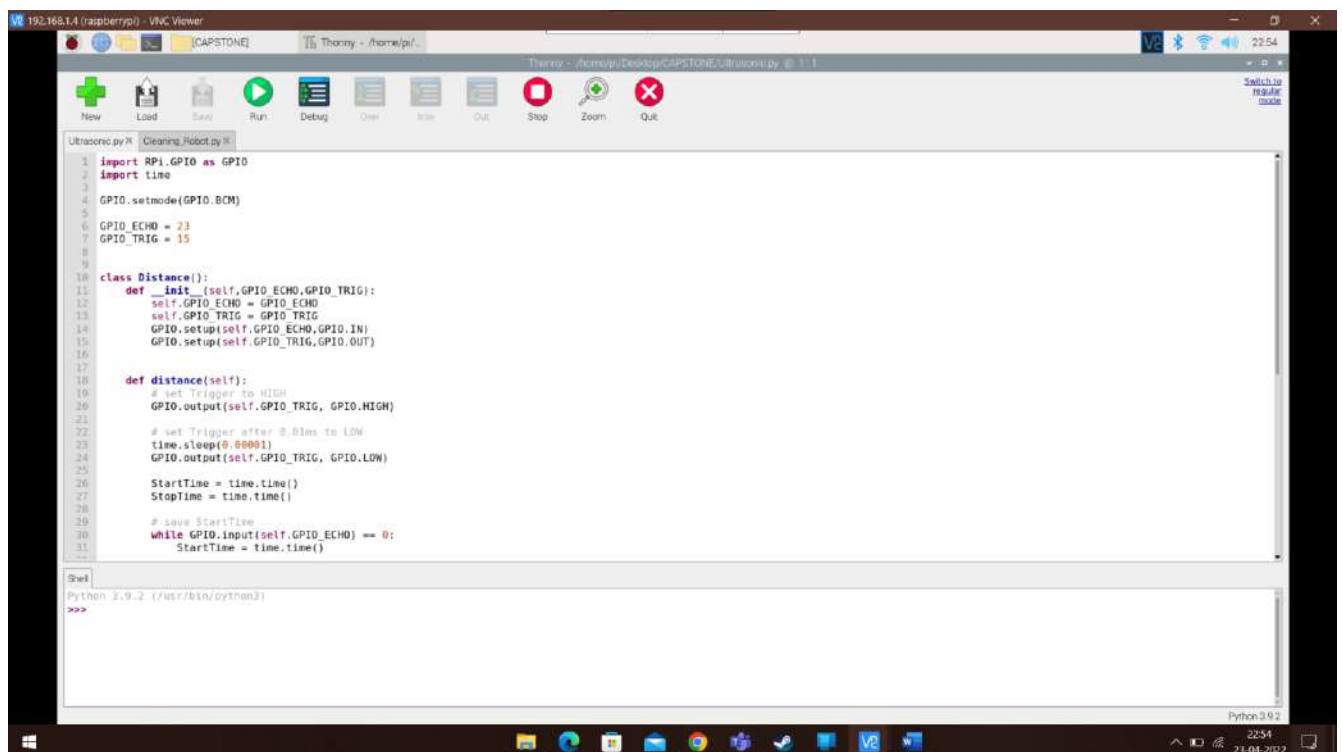

```
1 import RPi.GPIO as GPIO
2 import time
3
4 GPIO.setmode(GPIO.BCM)
5
6 GPIO_ECHO = 23
7 GPIO_TRIG = 15
8
9
10 class Distance():
11     def __init__(self,GPIO_ECHO,GPIO_TRIG):
12         self.GPIO_ECHO = GPIO_ECHO
13         self.GPIO_TRIG = GPIO_TRIG
14         GPIO.setup(self.GPIO_ECHO,GPIO.IN)
15         GPIO.setup(self.GPIO_TRIG,GPIO.OUT)
16
17     def distance(self):
18         # set Trigger to HIGH
19         GPIO.output(self.GPIO_TRIG, GPIO.HIGH)
20
21         # set Trigger after 0.5ms to LOW
22         time.sleep(0.00001)
23         GPIO.output(self.GPIO_TRIG, GPIO.LOW)
24
25         StartTime = time.time()
26         StopTime = time.time()
27
28         # save StartTime
29         while GPIO.input(self.GPIO_ECHO) == 0:
30             StartTime = time.time()
31             StopTime = time.time()
```

Fig. 2.9 Ultrasonic Sensor Code

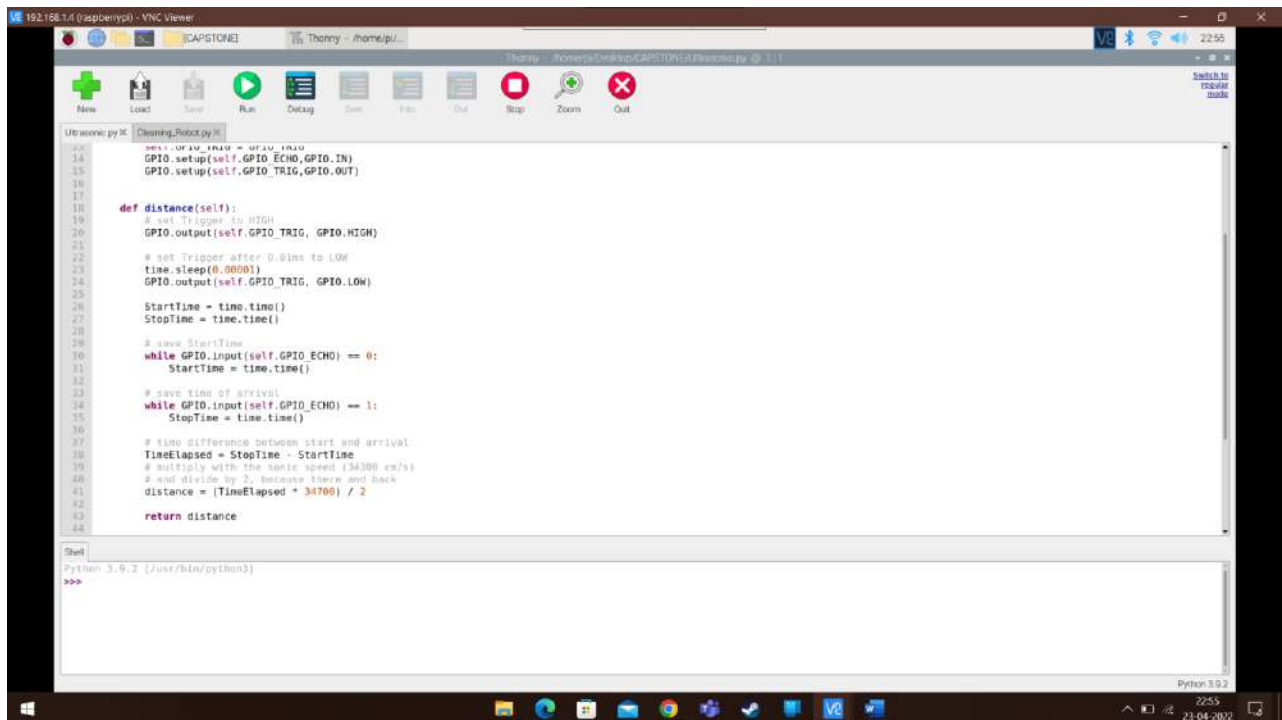


Fig. 2.10 Ultrasonic Sensor Code contd.


The operation of ultrasonic sensors is like that of radar sensors. The transmitter in a radar system produces radio waves (sound waves), which are electromagnetic waves that move through the air and return when they collide with an object in their path. The distance is then determined using the following simple formula,

$$\text{Distance} = \text{Time} \times \text{Speed}$$

Time – amount of time taken by the sound wave to travel from the detected object to the receiver.


Speed – Sound wave speed. Most ultrasonic sensors consist of a trigger that transmits infrared sound waves and a receiver that records the reflected sound waves which is used for the basic purpose of object detection by the cleaning robot.

2.12.2 Main Script:

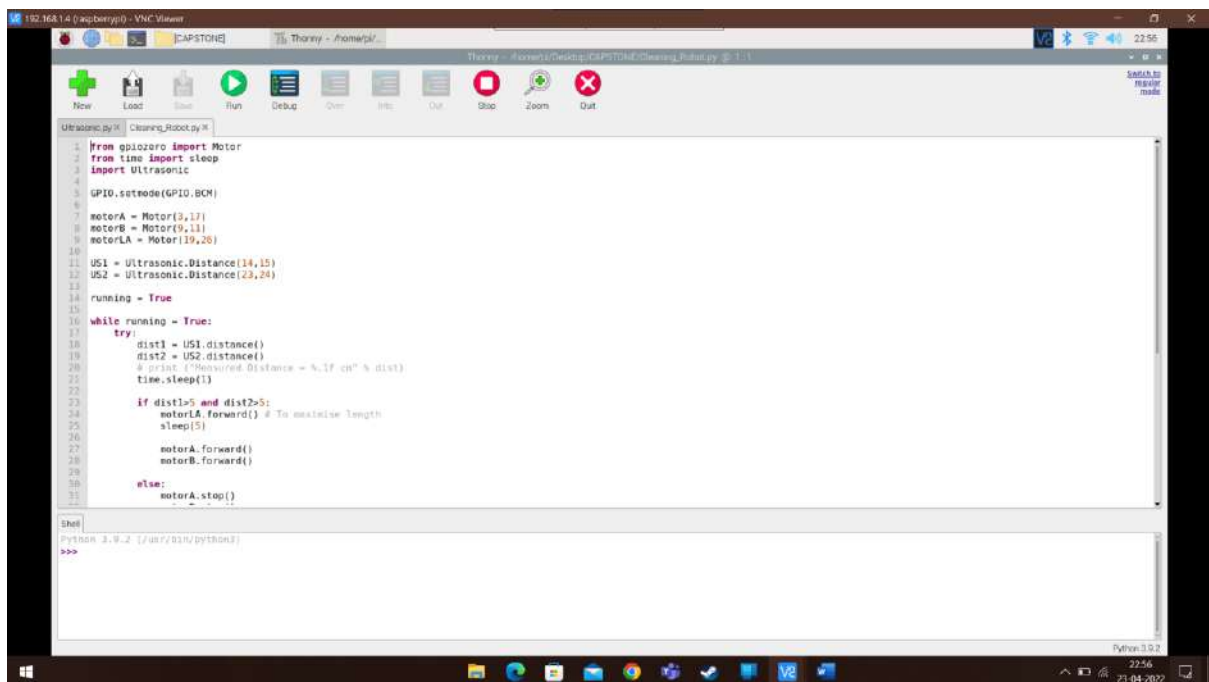

```
1 from epizero import Motor
2 from time import sleep
3 import Ultrasonic
4
5 GPIO.setmode(GPIO.BCM)
6
7 motorA = Motor(3,17)
8 motorB = Motor(9,11)
9 motorLA = Motor(19,20)
10
11 US1 = Ultrasonic.Distance(14,15)
12 US2 = Ultrasonic.Distance(23,24)
13
14 running = True
15
16 while running = True:
17     try:
18         dist1 = US1.distance()
19         dist2 = US2.distance()
20         # print ("Measured Distance = %.1f cm" % dist)
21         time.sleep(1)
22
23         if dist1>5 and dist2>5:
24             motorLA.forward() # To maximise length
25             sleep(5)
26             motorA.forward()
27             motorB.forward()
28         else:
29             motorA.stop()
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
```

Fig. 2.11 Main Script

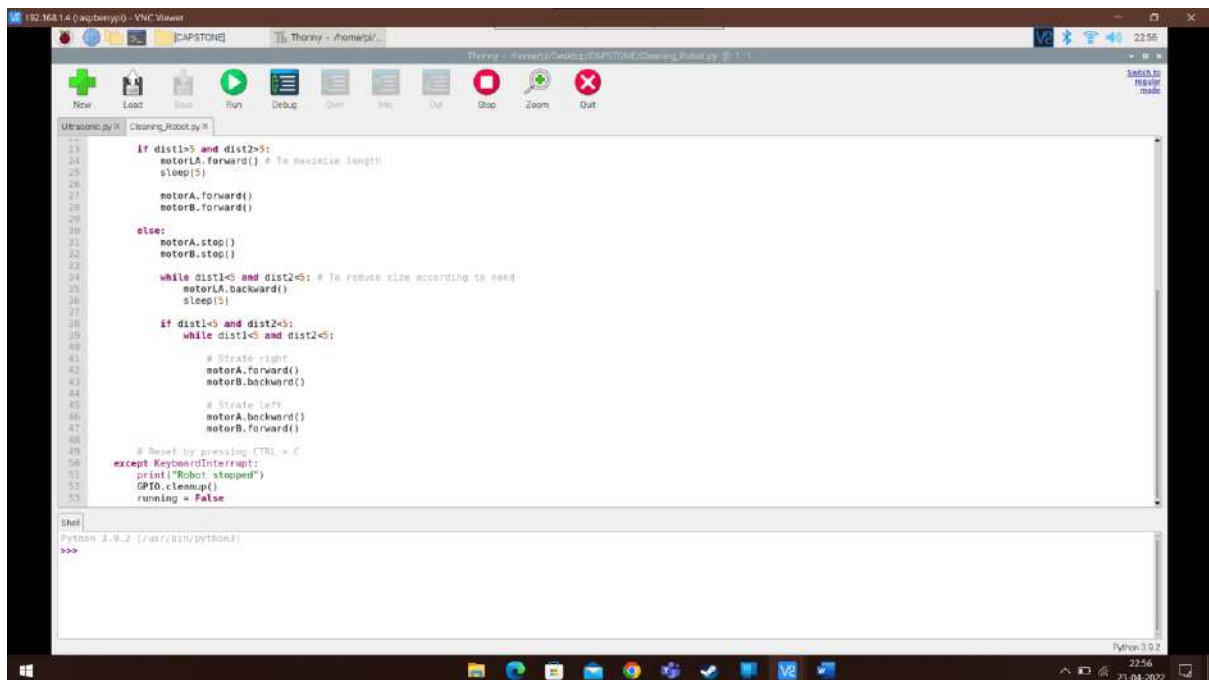

```
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
```

Fig. 2.12 Main Script contd.

The main script will run the robot. It will call the functions from the Ultrasonic file, and the Motor Class. It will then actuate the motors using the functions from the Motor Class, based on the inputs from the ultrasonic sensors.

2.13 DESIGN CALCULATIONS

2.13.1 Wheel Motor Torque Calculation for the 4 Mecanum Wheels:

Mass of Cleaning Robot = 9 kg

Radius of wheel = 0.03 m

$$\tau = \mu * M * g * R$$

1. Case 1 (Wooden Floor)

Coefficient of Friction between hard rubber and wooden floor = 0.7

Total Torque = $9 * 9.81 * 0.7 * 0.03 = 1.85409 \text{ Nm}$

Individual Torque of each motor = $1.85409 / 4 = 0.4635225 \text{ Nm}$

2. Case 2 (Ceramic)

Coefficient of Friction between hard rubber and ceramic tile = 0.32

Total Torque = $9 * 9.81 * 0.32 * 0.03 = 0.847584 \text{ Nm}$

Individual Torque of each motor = $0.847584 / 4 = 0.211896 \text{ Nm}$

3. Case 3 (Marble)

Coefficient of Friction between hard rubber and marble tile = 0.25

Total Torque = $9 * 9.81 * 0.25 * 0.03 = 0.662175 \text{ Nm}$

Individual Torque of each motor = $0.662175 / 4 = 0.16554375 \text{ Nm}$

4. Case 4 (Smooth Concrete)

Coefficient of Friction between hard rubber and smooth concrete surface = 0.38

Total Torque = $9 \times 9.81 \times 0.38 \times 0.03 = 1.006506 \text{ Nm}$

Individual Torque of each motor = $1.006506/4 = 0.2516265 \text{ Nm}$

5. Case 5 (Rough Concrete)

Coefficient of Friction between hard rubber and rough concrete surface = 0.62

Total Torque = $9 \times 9.81 \times 0.62 \times 0.03 = 1.642194 \text{ Nm}$

Individual Torque of each motor = $1.642194/4 = 0.4105485 \text{ Nm}$

2.14 VACUUM SYSTEM CALCULATIONS

Taking $D = 3 \text{ cm}$ (1.1811 in), and $L = 5 \text{ cm}$ (1.9685 in)

Speed of pump, $S_p = 49.3 \text{ CFM} = 23.267 \text{ L/s}$

Now,

Conductance of the system,

$$C = \frac{78 * D^3}{L}$$

$$C = \frac{78 * 1.1811^3}{1.9685} = 65.2858 \text{ L/s}$$

$$\therefore C = 133.3327 \text{ CFM}$$

Therefore,

Effective pump speed, S

$$\frac{1}{S} = \frac{1}{S_p} + \frac{1}{C}$$

$$\frac{1}{S} = \frac{1}{23.267} + \frac{1}{133.3327}$$

$$\therefore S = 19.81 \text{ CFM}$$

Now,

Velocity at orifice,

When robot is fully extended: $A = 50 \times 0.5 \text{ cm}^2 = 0.0269098 \text{ ft}^2$

$$Q = Av$$

$$\therefore v = \frac{19.81}{0.0269098} = 736.163 \text{ ft/min}$$

$$v = 3.74 \text{ m/s}$$

When robot is at minimum extension: $A = 30 \times 0.5 \text{ cm}^2 = 0.01614 \text{ ft}^2$

$$Q = Av$$

$$\therefore v = \frac{19.81}{0.01614} = 1227.385 \text{ ft/min}$$

$$v = 6.235 \text{ m/s}$$

2.15 BATTERY LIFE CALCULATIONS

2.15.1 Essential Components:

1. Units of Motors = $15 \times 4 = 60 \text{ W}$
2. Vacuum Pump = 40 W
3. RPLIDAR A1 = 0.5 W
4. Camera = 7.5 W
5. Raspberry Pi 4 Model B = 25 W

Total Power Consumption by the essential components = 133 W

Rounded off to 135 W for ease of battery life calculations.

Battery type chosen is Lithium-ion

Battery Life = 240 Watt-Hour/135 W = 1.78 hours = 106.8 mins = 107 mins (Rounded off)

2.16 COMPONENTS

Table 2.1 List of Components

<u>Component</u>	<u>Qty</u>	<u>Specs/Model Name</u>	<u>Dimensions</u>	<u>Weight</u>	<u>Price (Rs.)</u>
LIDAR	1	RPLIDAR A1	98.5 x 70 x 60 mm	170 gm	8,549
Mecanum Wheels	4	45° in Tank Drive configuration, Load 3Kg/wheel	60 x 31 mm (Diameter x Width)	93 gm (per wheel)	5,549
Vacuum Pump	1	Nidec G10D	97 x 94 x 33 mm	180 gm	8,538
Dust box	1	With HEPA Filter	600 ml	87 gm	150
Battery pack	2	Orange 18650 Li-ion 5000mAh-6s-22.2v-3c 6S2P	160 x 100 x 50 mm (for 1)	770 gm (x2)	3,299 (x2)
Wheel Motor	4	Johnson Geared Motor (Grade B) 12 V DC	Ø 27 X 64 mm (for 1)	164 gm (x4)	384 (x4)
Motor Driver	2	L298N 2A Based Motor Driver Module	44 x 44 x 28 mm	25 gm (x2)	129 (x2)
Raspberry Pi	1	Raspberry Pi 4 Model B 4GB	85.6mm x 56.5mm	52 gm	5,149

Camera	1	Raspberry PI 5MP Camera Board Module	4 x 3 x 2 cm	10 gm	389
IMU		MPU9250 9-Axis Attitude Gyro Accelerator Magnetometer Sensor Module	25 x 15 x 3.5 mm	5 gm	749
Ball Screw Actuator	2	Linear Actuator Stroke Length 100MM,7mm/S,1500N,12V	210 x 74 x 36 mm	889 gm (x2)	3900 (x2)
DC/DC Converter	1	24V/12V to 5V 5A Power Module DC-DC XY-3606 Power Converter	63 x 27 x 10 mm	22 gm	289
DC/DC Converter	1	A2412S-1WR2 Mornsun 24V to ± 12 V DC-DC Converter 1W Power Supply Module - Ultra Compact SIP Package	19.5 x 6 x 9.3 mm	2.4 gm	395
Ultrasonic Sensor	2	HC-SR04	5 x 4 x 3 cm	14gm (x2)	75 (x2)

1. LIDAR Scanner:



Fig. 2.13 RPLIDAR A1

RPLIDAR A1 has been chosen as it has been specifically designed for indoor robotic SLAM applications, and has been designed for the Raspberry Pi 4 Model B microprocessor, which is the microprocessor used in the robot.

2. Mecanum Wheel:

- i) $\Phi 60$ mm
- ii) Load Capacity: 3Kg/Wheel
- iii) Body Material: Al Alloy
- iv) Length of Roller: 30 mm



Fig. 2.14 Mecanum Wheel

Mecanum wheels with 45° roller orientation have been chosen for the added manoeuvrability and degrees of freedom they provide, such as strafing and turning on the spot.

3. Vacuum Pump:

- i) Model: Nidec G10D
- ii) Rated speed: 5700 RPM
- iii) Max. Airflow: 49.3 CFM
- iv) Max. Static Pressure: 395 Pa
- v) Rated Voltage: 12 V
- vi) Rated Input: 38.4 W

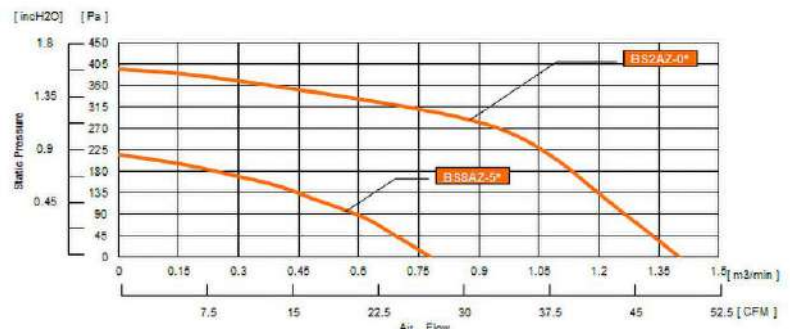


Fig. 2.15 Vacuum Pump Characteristic



Fig. 2.16 Vacuum Pump

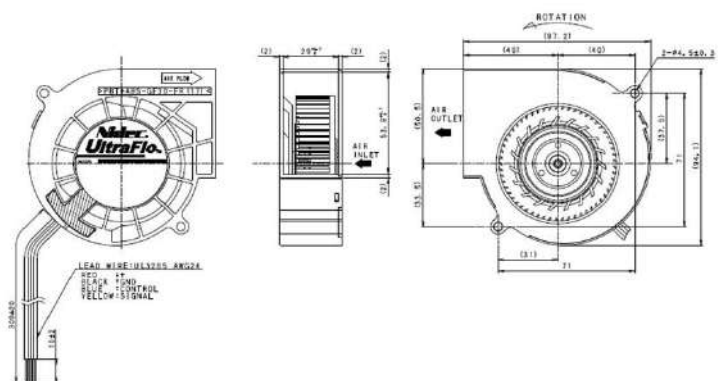


Fig. 2.17 Vacuum Pump Sketches

The vacuum pump has been chosen on the basis of space available inside the robot, and the maximum discharge that it can provide, measured in CFM (Cubic Feet per Minute).

4. Battery Pack:

- i) Model: Orange 18650 Li-ion
- ii) Nominal Voltage: 22.2 V
- iii) Max. Charging Voltage: 25.2 V
- iv) Nominal Capacity: 5000 mAh
- v) Max. Discharge Current: 15 A



Fig. 2.18 Battery

A battery pack consisting of two 24V 5000 mAh batteries connected in parallel has been chosen for its excellent battery backup. Such a large battery pack is feasible because there is sufficient space inside the robot.

5. Wheel Motor:

- i) Johnson Geared Motor (Grade B)
- ii) Base Motor RPM: 18000
- iii) 500 RPM
- iv) Rated Torque: 0.1 Nm
- v) Stall Torque: 0.48 Nm
- vi) Nominal Voltage: 12 V
- vii) Operating Range: 6 – 18 V



Fig. 2.19 DC Motor

A geared DC motor with relatively high torque to meet the torque requirement as per the mathematical analysis has been chosen. Since it is a cleaning robot, high robot velocity is not a priority, hence 500 RPM is sufficient.

6. Motor Driver:

- i) Double H bridge Drive Chip: L298N 2A
- ii) Operating Voltage (VDC): 5~35
- iii) Peak Current (A): 2
- iv) Continuous Current (A): 0-36mA
- v) No. of Channels: 2
- vi) Can control up to 4 DC Motors



Fig. 2.20 Motor Driver

L298N Motor driver has been chosen since it is a very popular choice for robotics projects, and it also meets the design requirements of the robot. It can control up to 4 DC motors, has an inbuilt 5V regulator, and is very cost effective. The robot will use two of these motor drivers – one for the four-wheel motors, and one for the two ball screw actuator motors and the vacuum pump motor.

7. Raspberry Pi 4:

Raspberry Pi 4 Model B 4GB has been chosen because of the complexity of the robot and its various subsystems. A powerful microprocessor is needed to coordinate and execute all the various subsystems in real time.

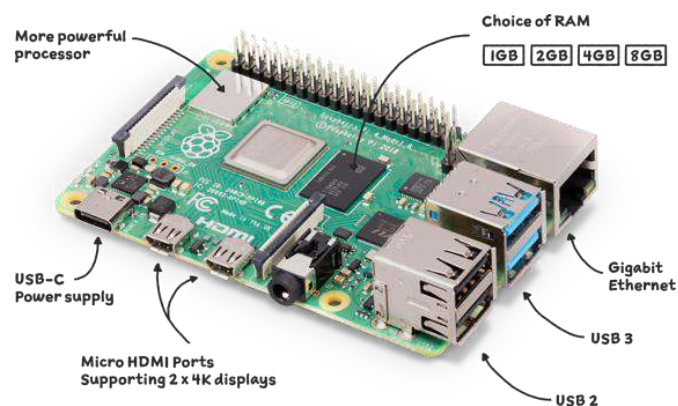


Fig. 2.21 Raspberry Pi 4

8. Camera:

- i) Model: Raspberry Pi 4 Model B camera module
- ii) Resolution: 5 MP
- iii) Supported Video Formats: 1080p @ 30fps,
720p @ 60fps and 640x480p 60/90 video
- iv) Fully compatible with Raspberry Pi 3/4



Fig. 2.22 Pi Camera

A Raspberry Pi 4 Model B camera module has been chosen because of its low cost, and compatibility and ease of integration with the Raspberry Pi 4 Model B microprocessor. A camera module is needed for object detection and to transmit a live video feed via Bluetooth/Wi-Fi.

9. IMU:

- i) Model: MPU9250
- ii) Accelerometer, Gyroscope & Magnetometer
- iii) 9 DOF Modules
- iv) Power Supply: DC3.3V-5V
- v) Chip: MPU9250
- vi) Gyro range: ± 250 500 1000 2000 $^{\circ}/s$
- vii) Acceleration range: ± 2 ± 4 ± 8 $\pm 16g$
- viii) Magnetic field range: $\pm 4800\mu T$

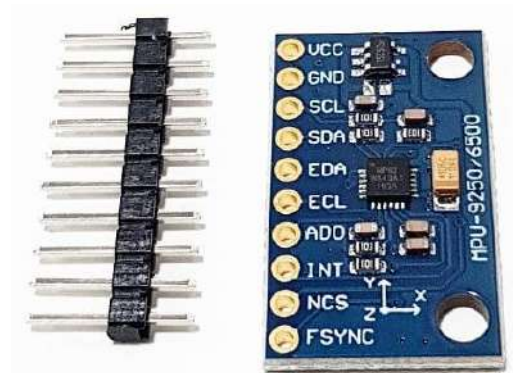


Fig. 2.23 IMU

An IMU module has been chosen to fulfil the localization needs of the robot. It has 9DOF and is cost effective.

10. Ball Screw Actuator:

- i) Stroke Length: 100 mm
- ii) 7 mm/s
- iii) Permanent magnet DC motor drive:
Voltage 12VDC
- iv) Self-Locking Force: 1500N
- v) Aluminium frame and extension tube
- vi) Long life: A service life of more than 50000 times



Fig. 2.24 Ball Screw Actuator

Ball screw linear actuators have been chosen to facilitate the extension and retraction of the robot. The stroke length perfectly matches the project needs, frictional losses are minimal, and controlling it is relatively easy because of DC motors.

11. DC/DC Converters:



Fig. 2.25 DC/DC Converters

- | | |
|---------------------------------|----------------------------------|
| i) Working voltage: DC 9V–36V | i) 24V to 12V DC -DC Converter |
| ii) Output voltage: 5.2V/5A/25W | ii) High efficiency of up to 80% |

DC/DC converters have been chosen since the robot uses a 24V battery pack. The first DC/DC converted reduces the voltage to 5V for the Raspberry Pi and the on-board sensors. The second one reduces the voltage to 12V for the ball screw actuators and the vacuum pump.

12. Ultrasonic Sensor:



- i) Operating Voltage: 5V
- ii) Sonar Sensing Range: 2-400 cm
- iii) Max. Sensing Range: 450 cm
- iv) Frequency: 40 kHz

Fig. 2.26 HC-SR04 Ultrasonic Sensor

Ultrasonic sensor has been chosen as a range sensor as they are cost effective and reliable and can be used for obstacle detection.

2.17 DESIGN PROTOTYPE (REVIEW 1)

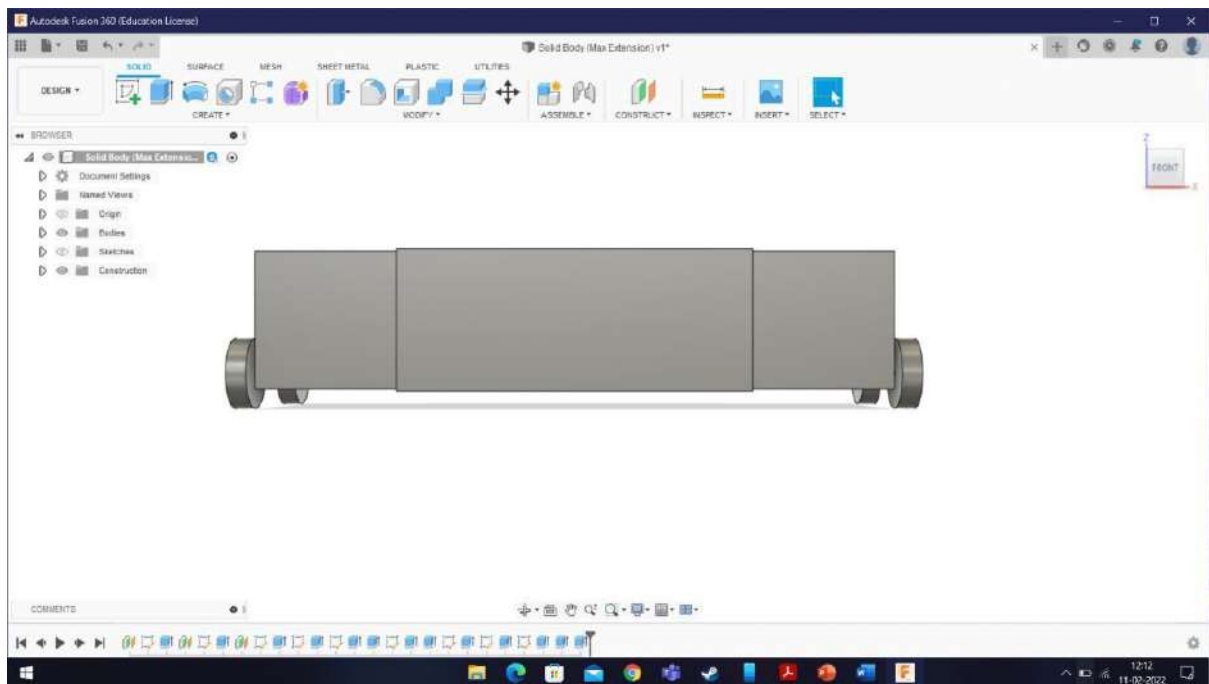


Fig. 2.27 Front View (Design Prototype)

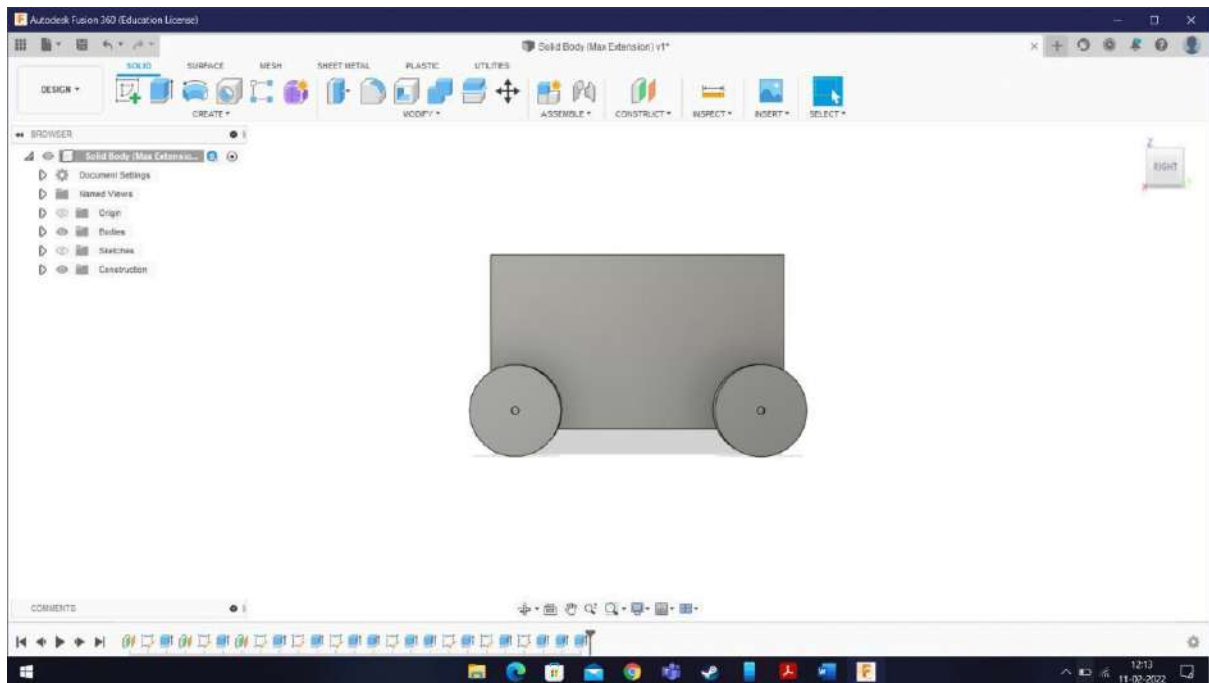


Fig. 2.28 Side View (Design Prototype)

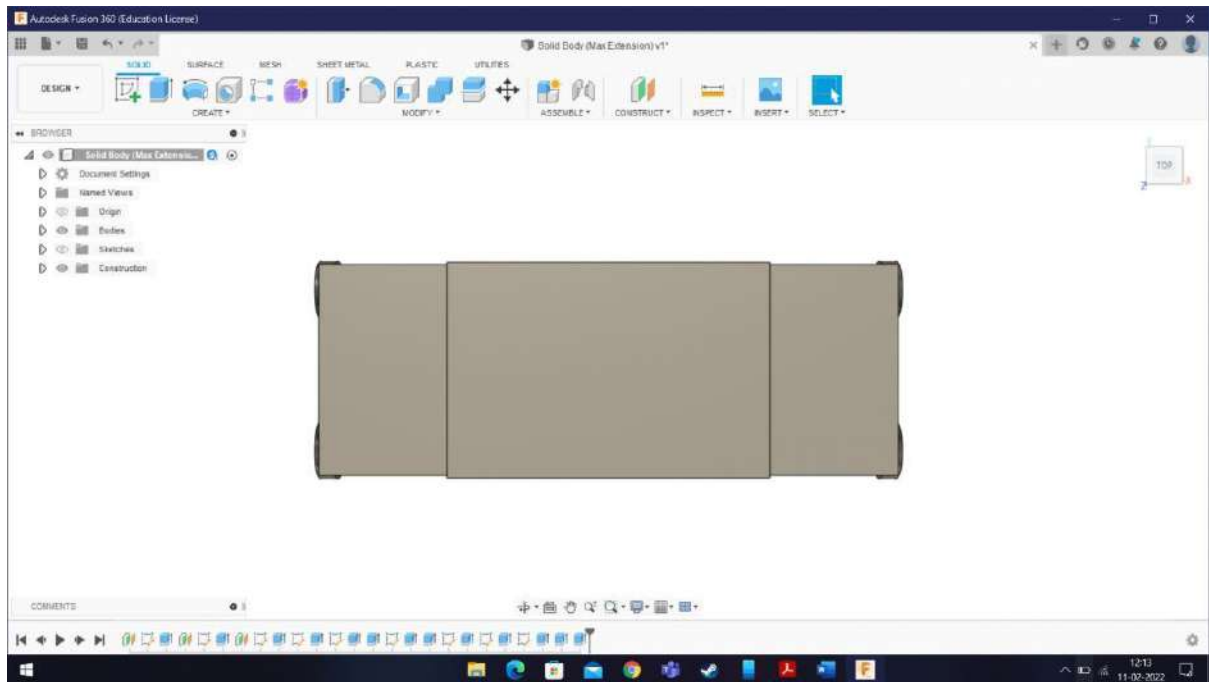


Fig. 2.29 Top View (Design Prototype)

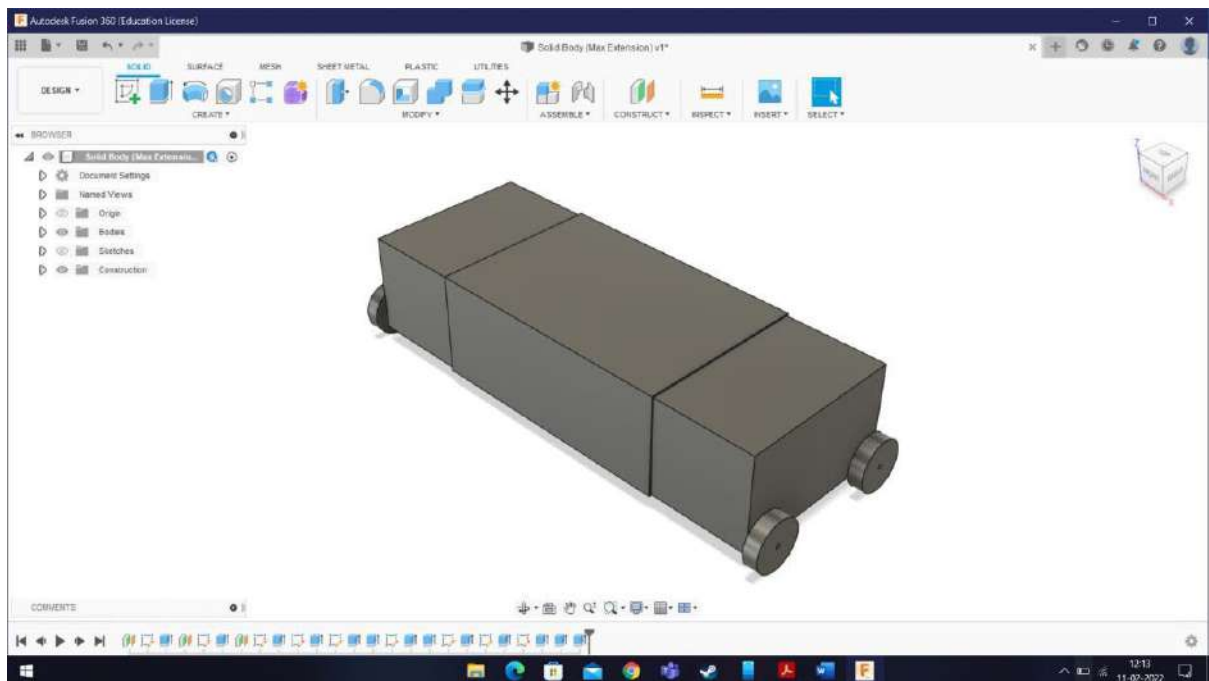


Fig. 2.30 Isometric View (Design Prototype)

2.18 CAD DESIGN

The robot comprises three hollow cuboid compartments that overlap and can linearly actuate with the help of the ball screw mechanism. The vacuum system comprises a set of rigid concentric pipes, and there will be a slit along the length of the pipe which will make the vacuum opening. The ends of these pipes will be attached to the walls of the robot on both sides. Hence, whenever the pipes will move further away from each other the slit opening will also increase making it more efficient to collect dust. These pipes will be connected to a storage compartment via a connecting pipe.

Increasing the area of the vacuum opening will reduce the suction power so to overcome this problem a motor will be inserted which will adjust the suction power based on the largest opening. For example, when the robot is fully extended it will be powerful enough to absorb dust at the largest opening and when the opening size reduces i.e., when the robot contracts, the vacuum motor voltage will automatically be reduced using a buck converter in order to maintain a constant suction pressure.

1. Main Box:

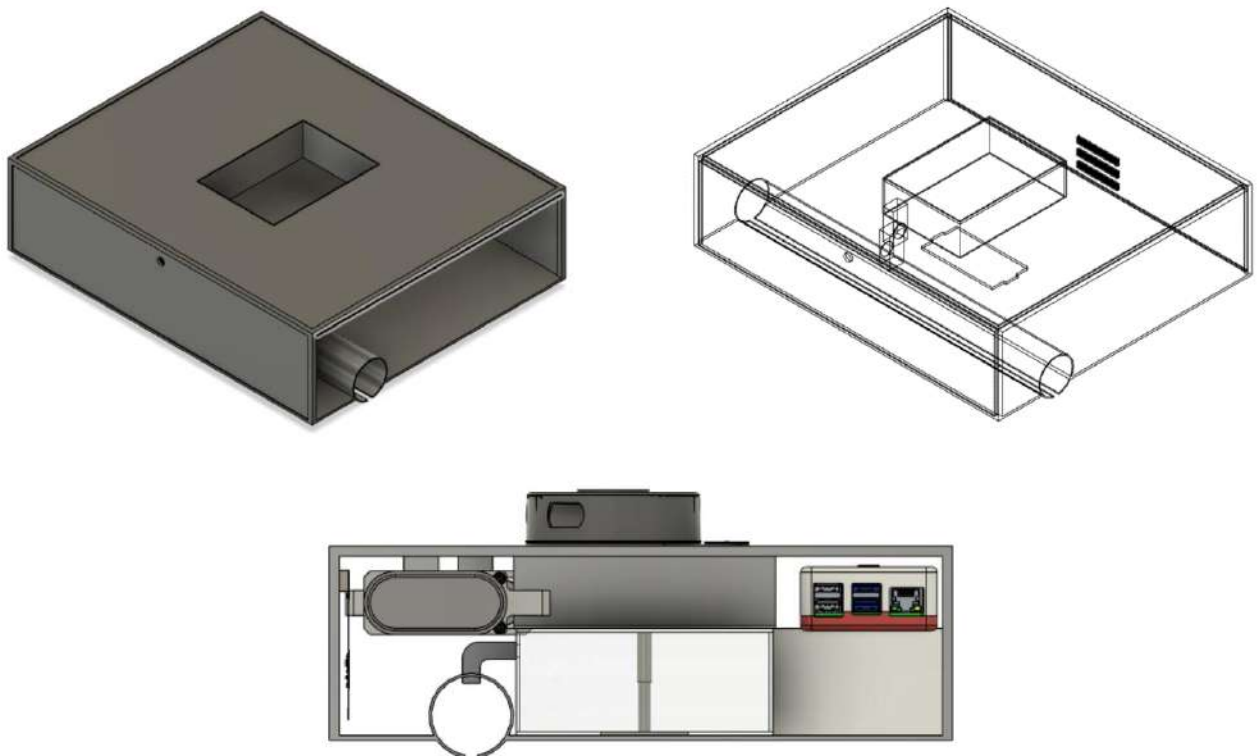


Fig. 2.31 Main Box

2. Left Box:

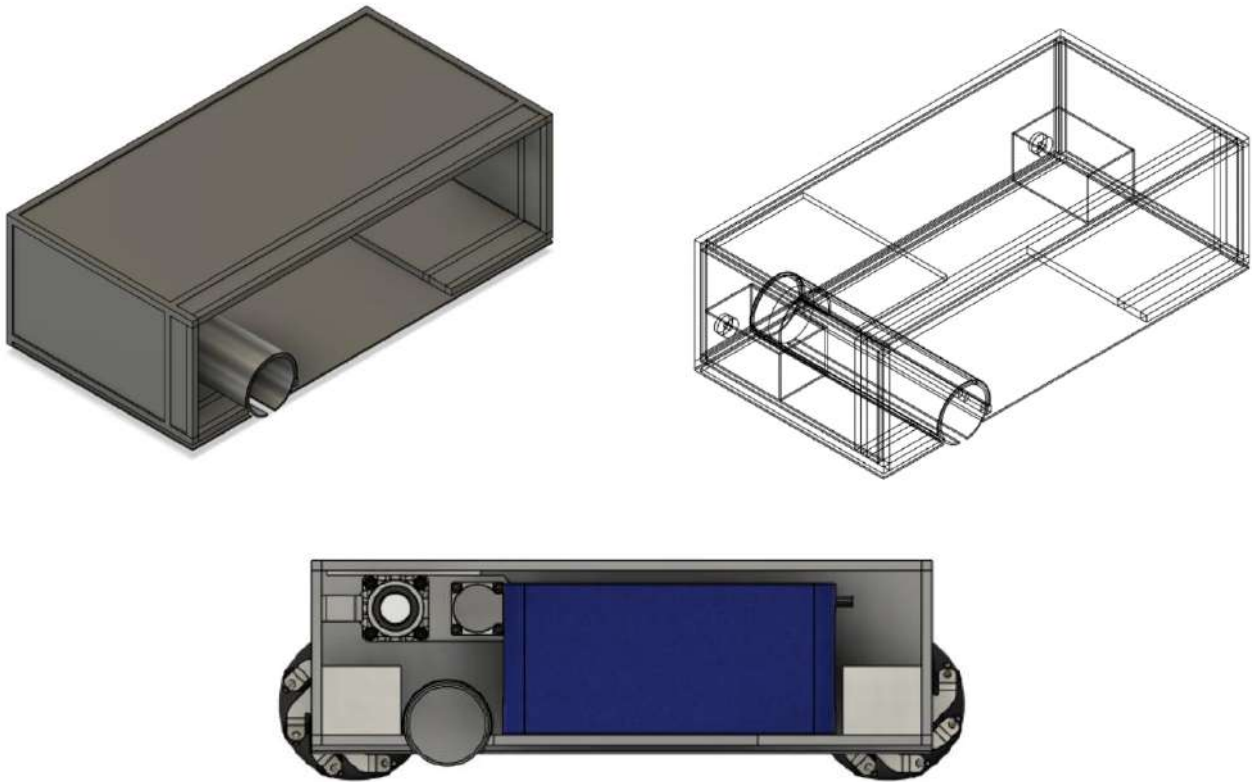


Fig. 2.32 Left Box

3. Right Box:

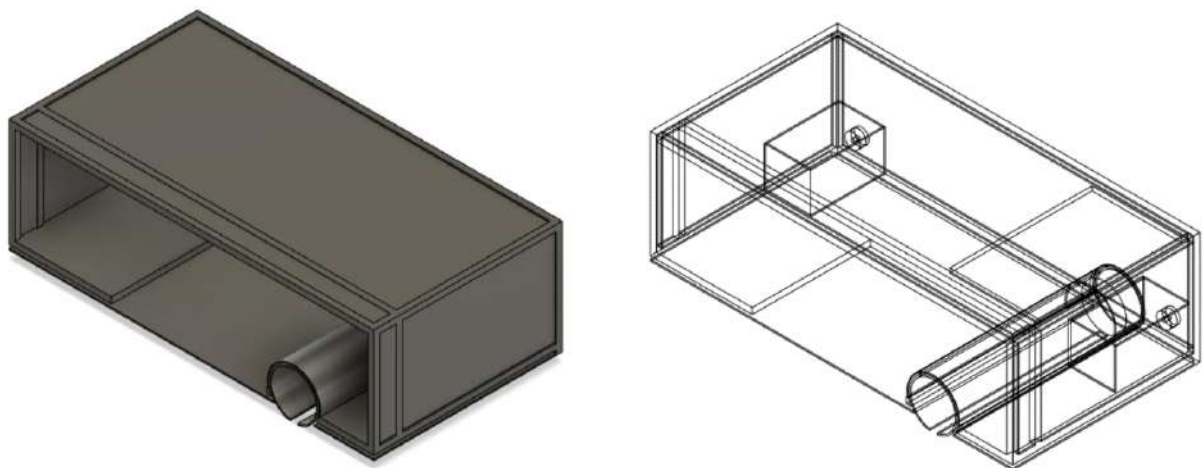




Fig. 2.33 Right Box

4. LIDAR Scanner:



Fig. 2.34 LIDAR CAD Model

5. Mecanum Wheel:

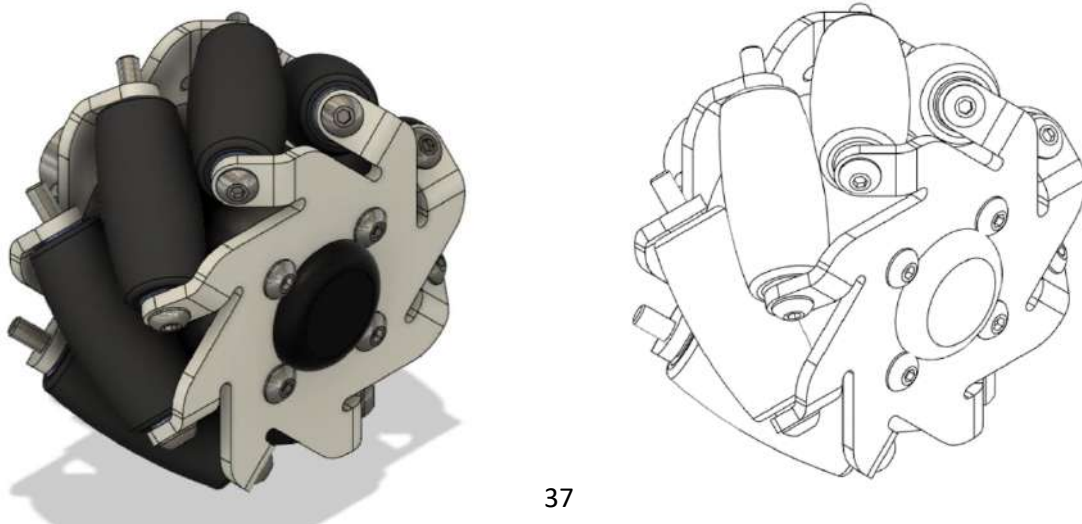


Fig. 2.35 Mecanum Wheel CAD Model

6. Vacuum Pump:

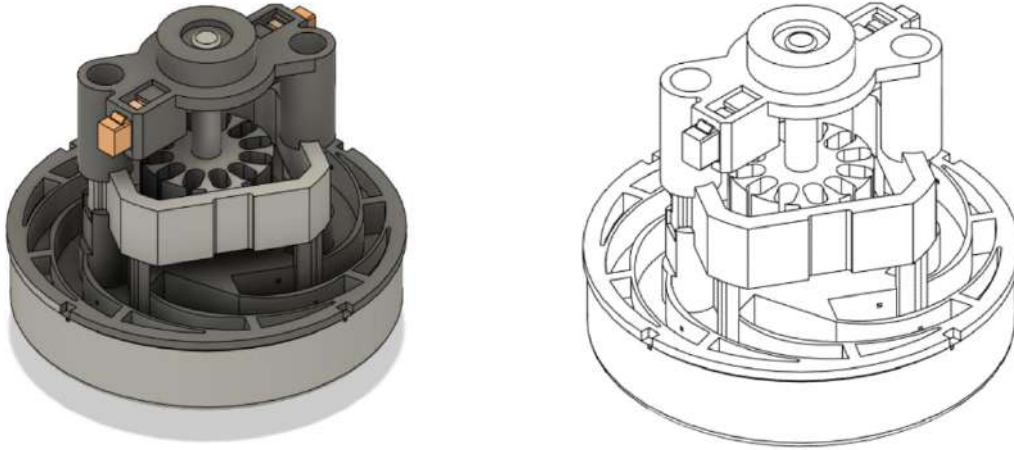


Fig. 2.36 Vacuum Pump CAD Model

7. Battery Pack:

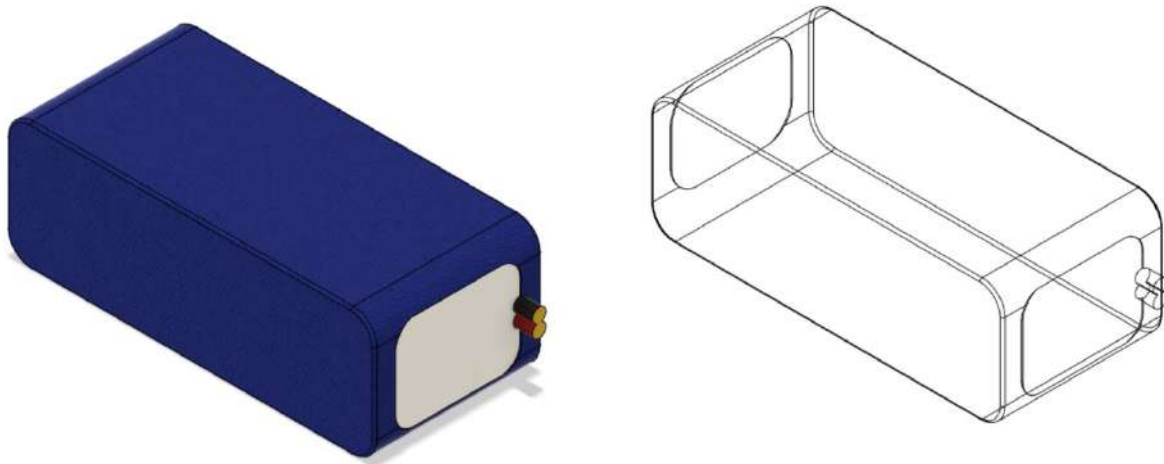


Fig. 2.37 Battery CAD Model

8. Wheel DC Motor:

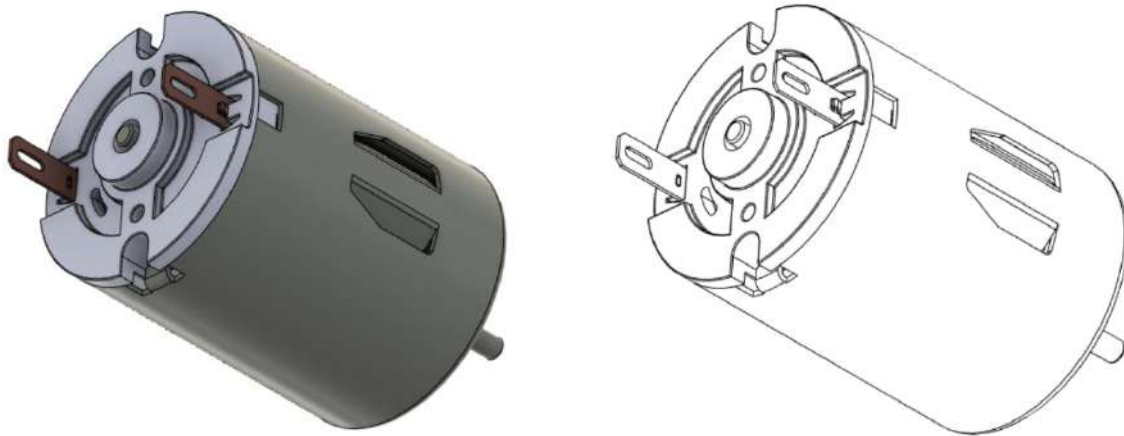


Fig. 2.38 DC Motor CAD Model

9. Raspberry Pi 4:

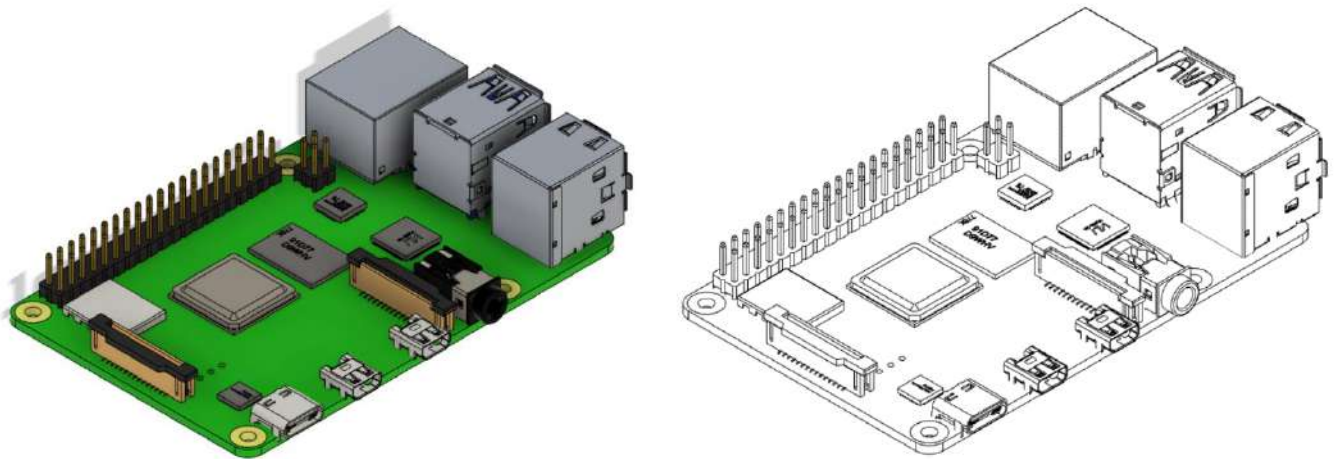


Fig. 2.39 Raspberry Pi 4 CAD Model

10) Camera



Fig. 2.40 Pi Camera CAD Model

11) Ball Screw Actuator:

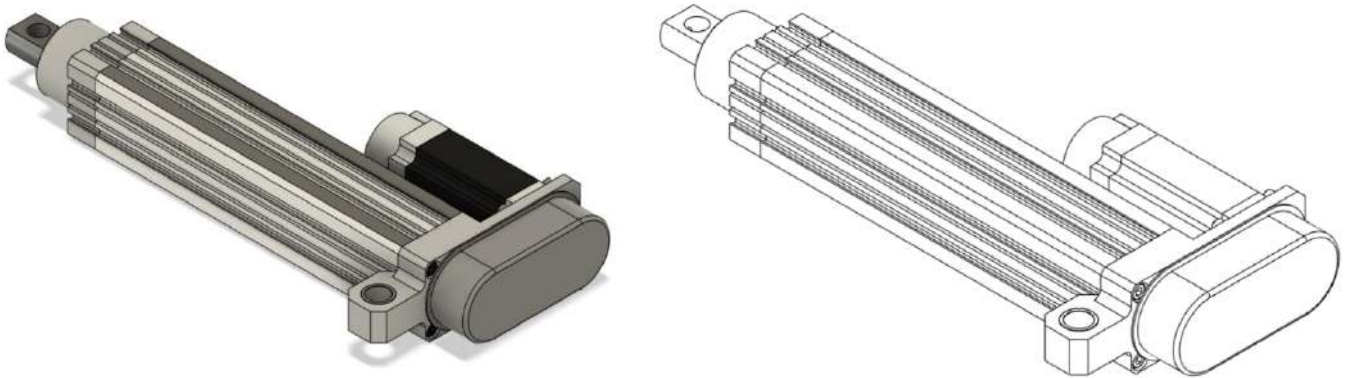


Fig. 2.41 Ball Screw Actuator CAD Model

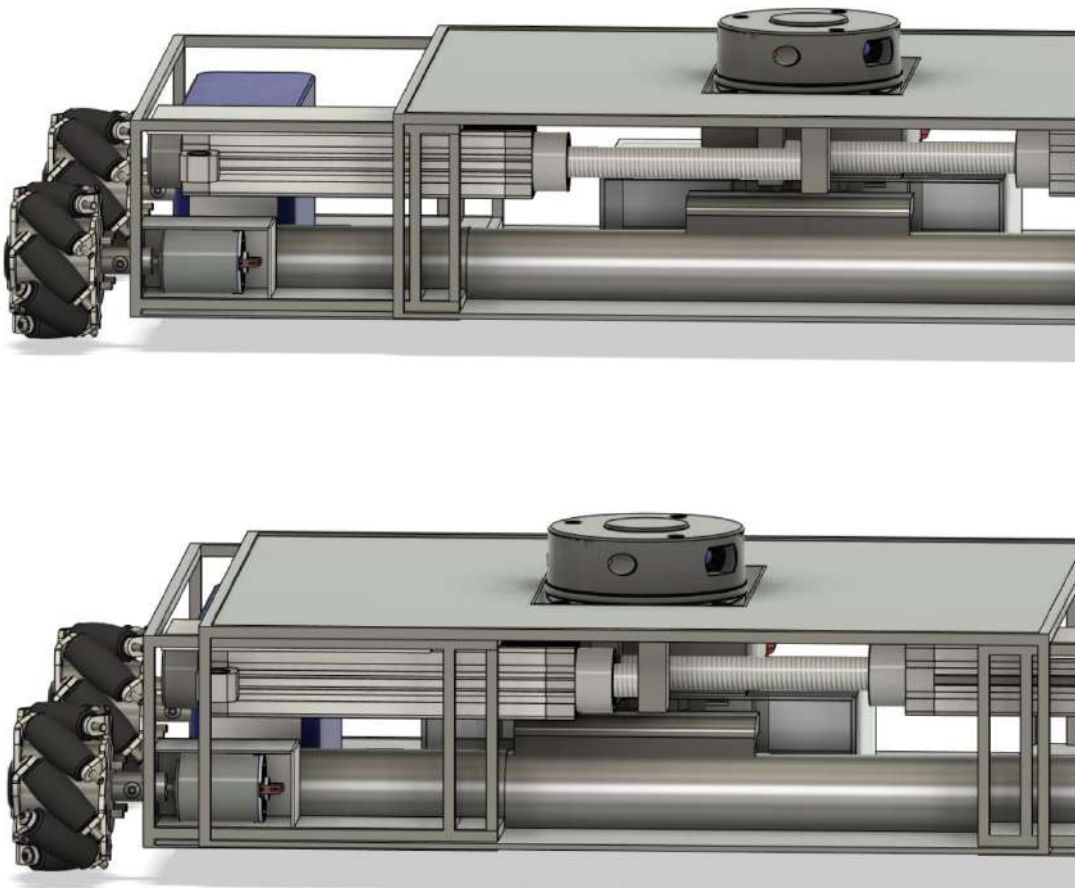


Fig. 2.42 Ball Screw Actuation Mechanism

2.19 FINAL MODEL



Fig. 2.43 Isometric View (CAD)



Fig. 2.44 Front View (CAD)



Fig. 2.45 Side View (CAD)



Fig. 2.46 Top View (CAD)

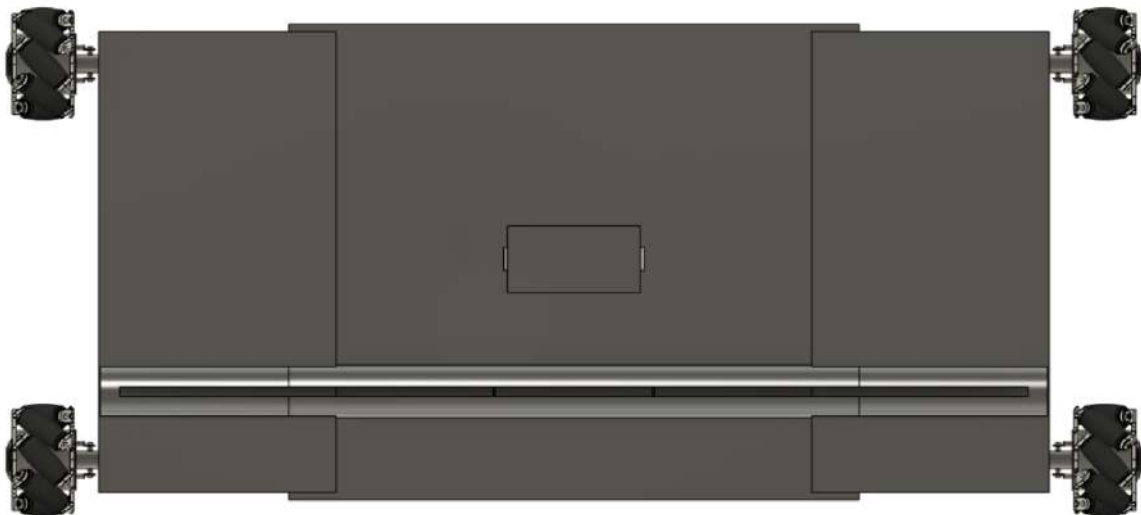


Fig. 2.47 Bottom View (CAD)



Fig. 2.48 Back View (CAD)

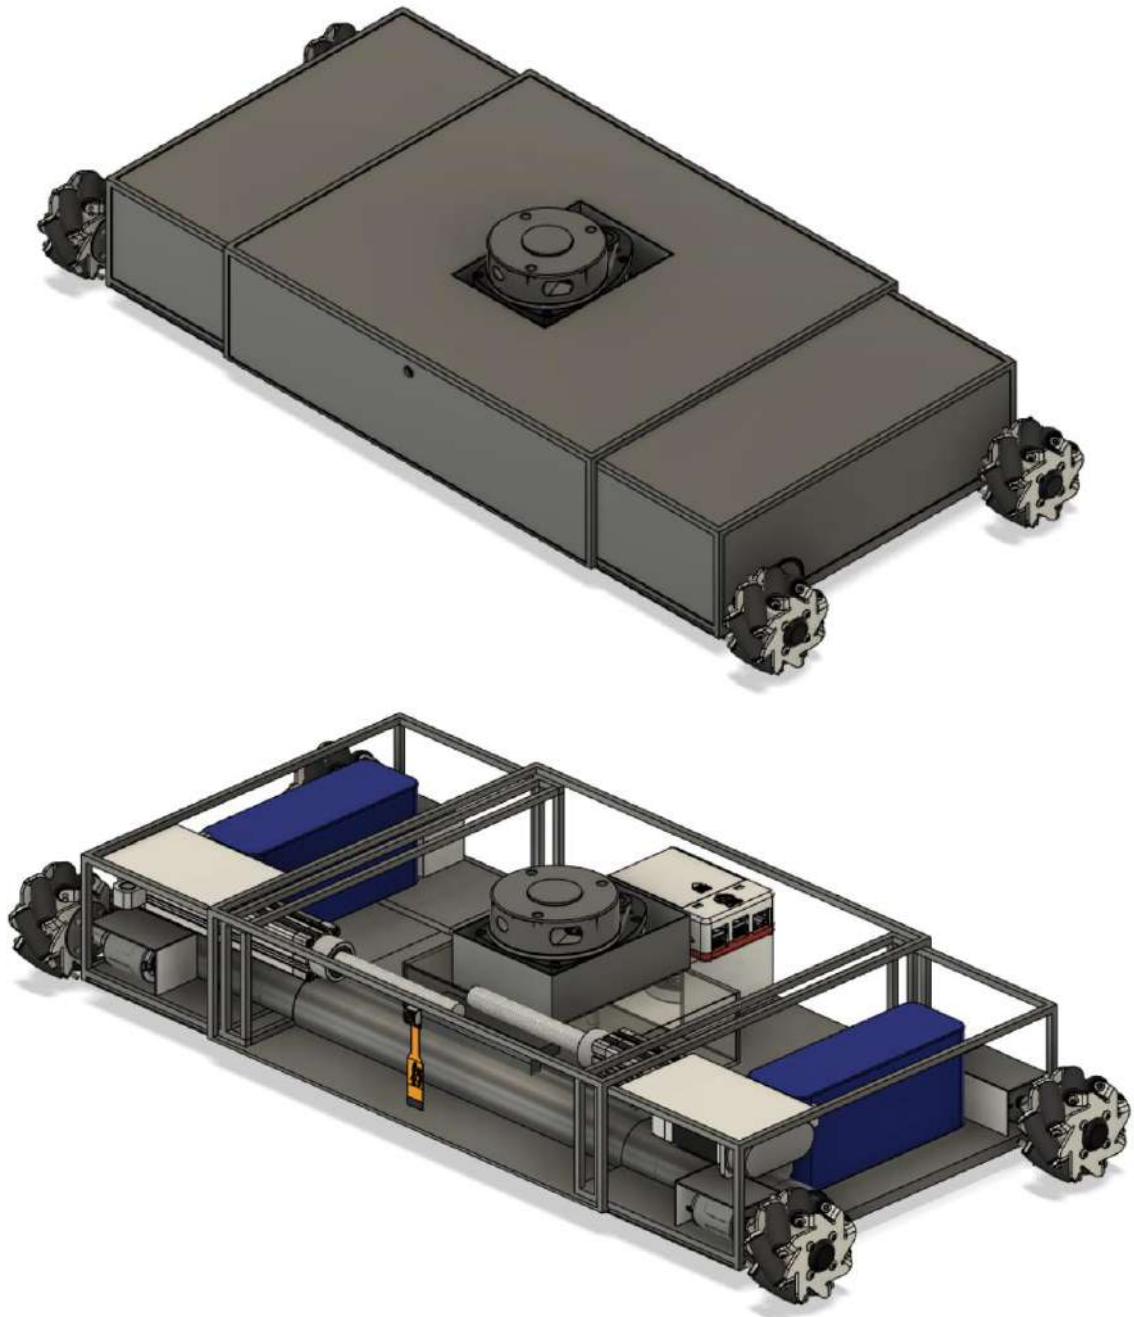


Fig. 2.49 Maximum Length (CAD)

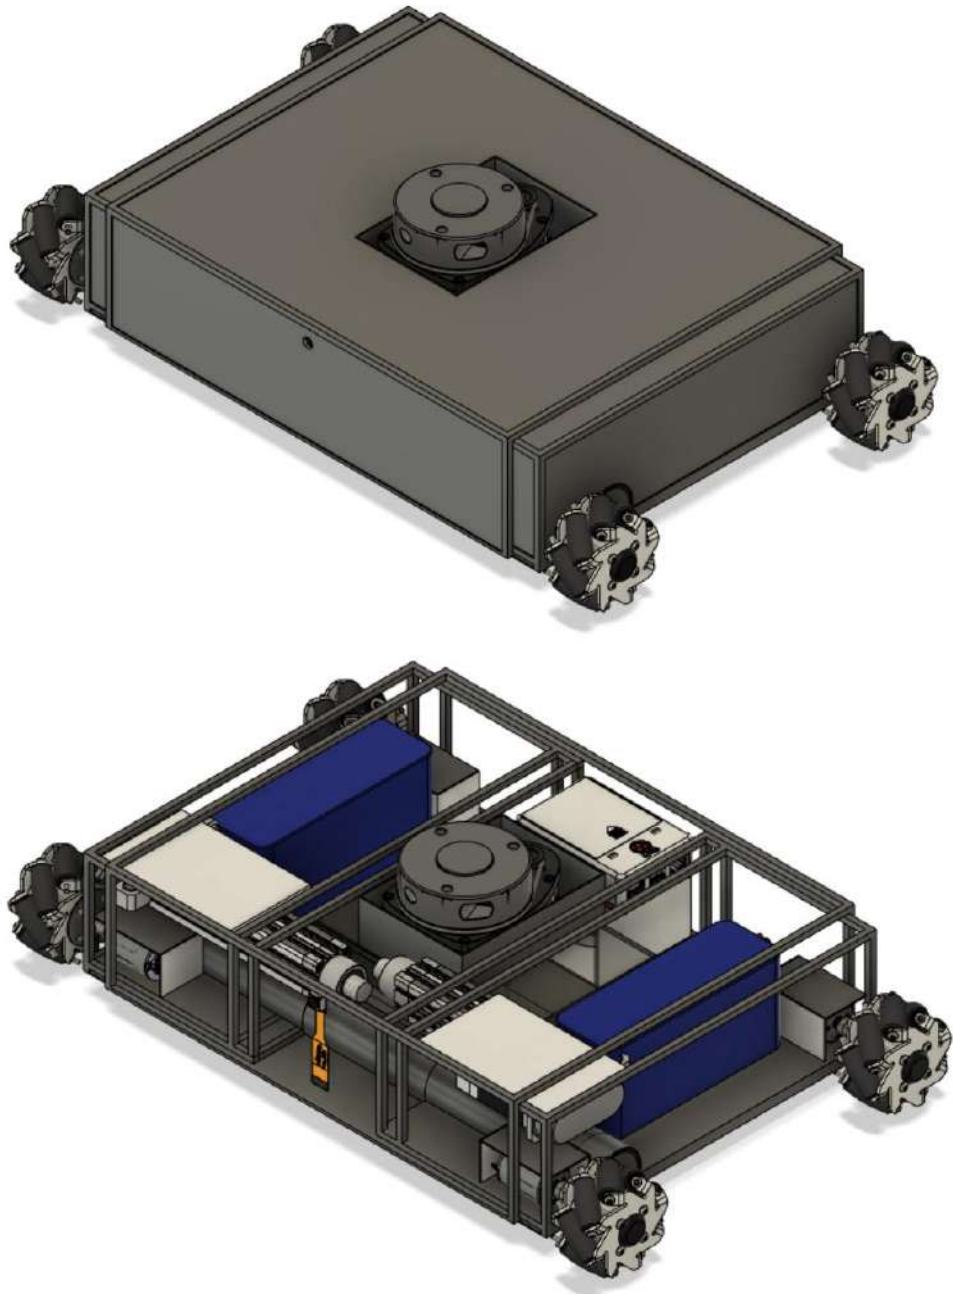


Fig. 2.50 Minimum Length (CAD)

CHAPTER 3

RESULTS AND DISCUSSION

3.1 SIMULATION

A simulation study has been created to demonstrate and analyse the efficacy and effectiveness of the system. A simplified CAD model has been developed to ensure that the simulation goes smoothly. The CAD model has further been exported as a URDF file, and then imported into the simulation software. The simulation software chosen is CoppeliaSim (V-REP) because of its simplicity and familiarity with the software. Further, the joints and links have been defined, sensors integrated, and the scene set. The robot can move and also change its size effectively.

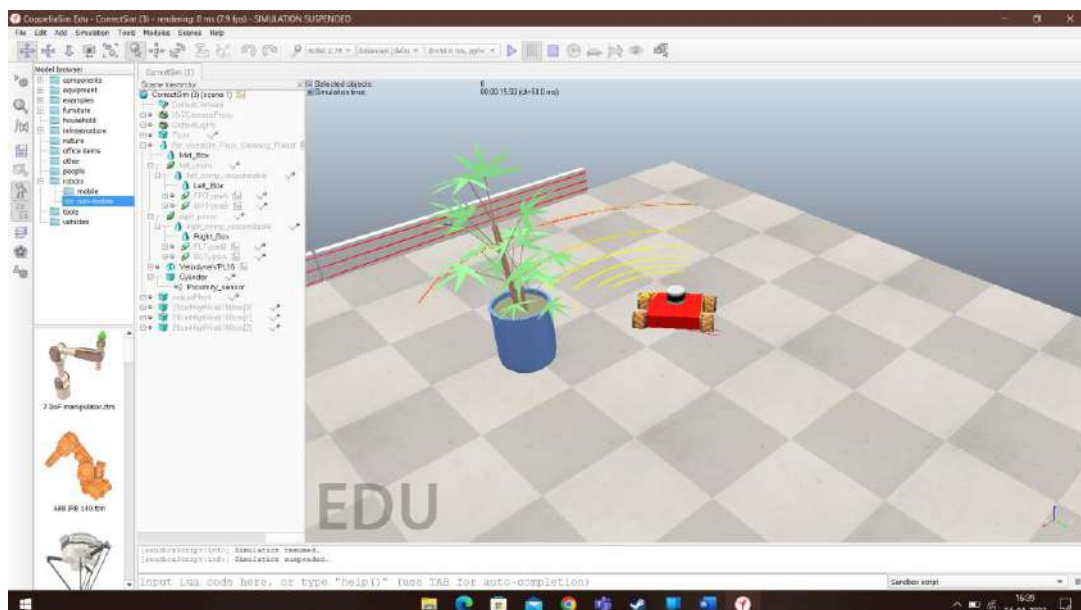
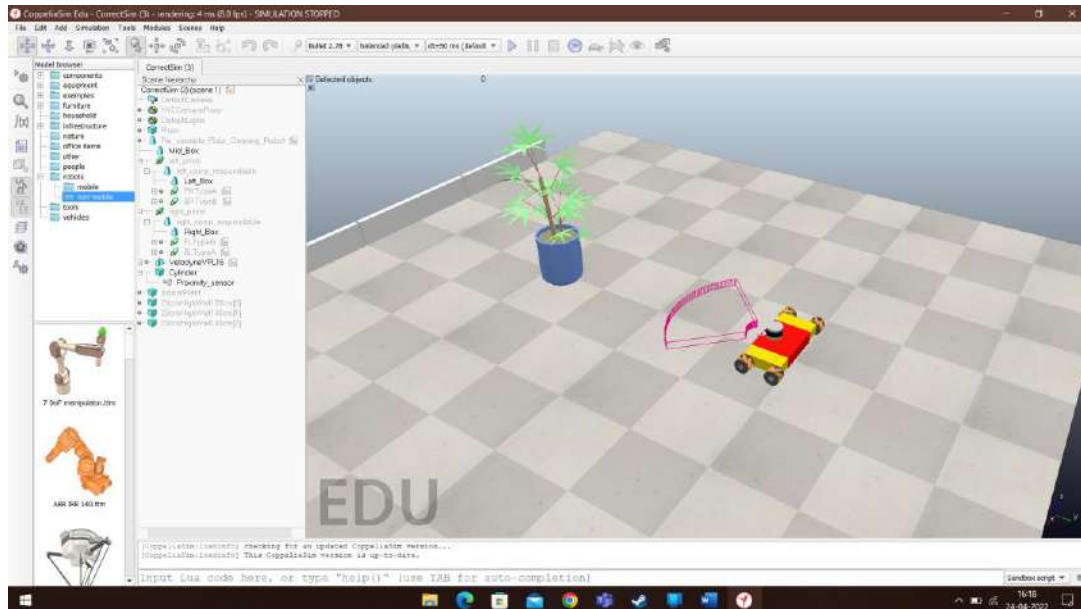


Fig. 3.1 Simulation

As demonstrated in Fig. 3.1, the robot can detect and avoid obstacles effectively.

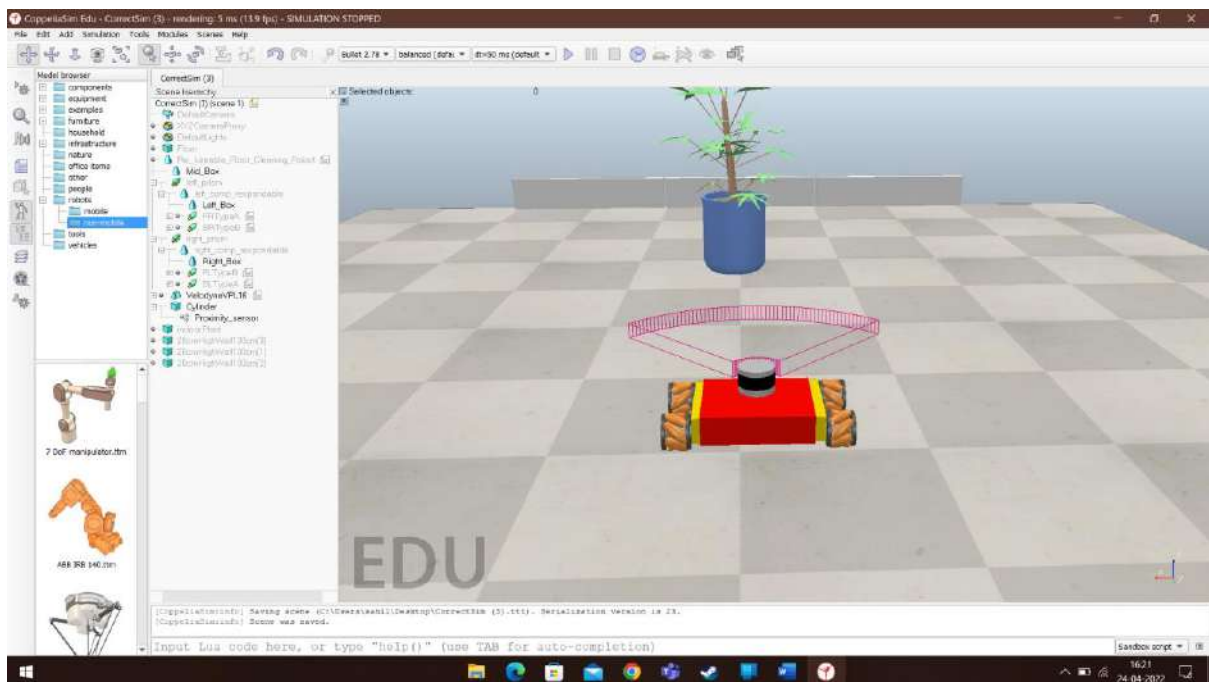
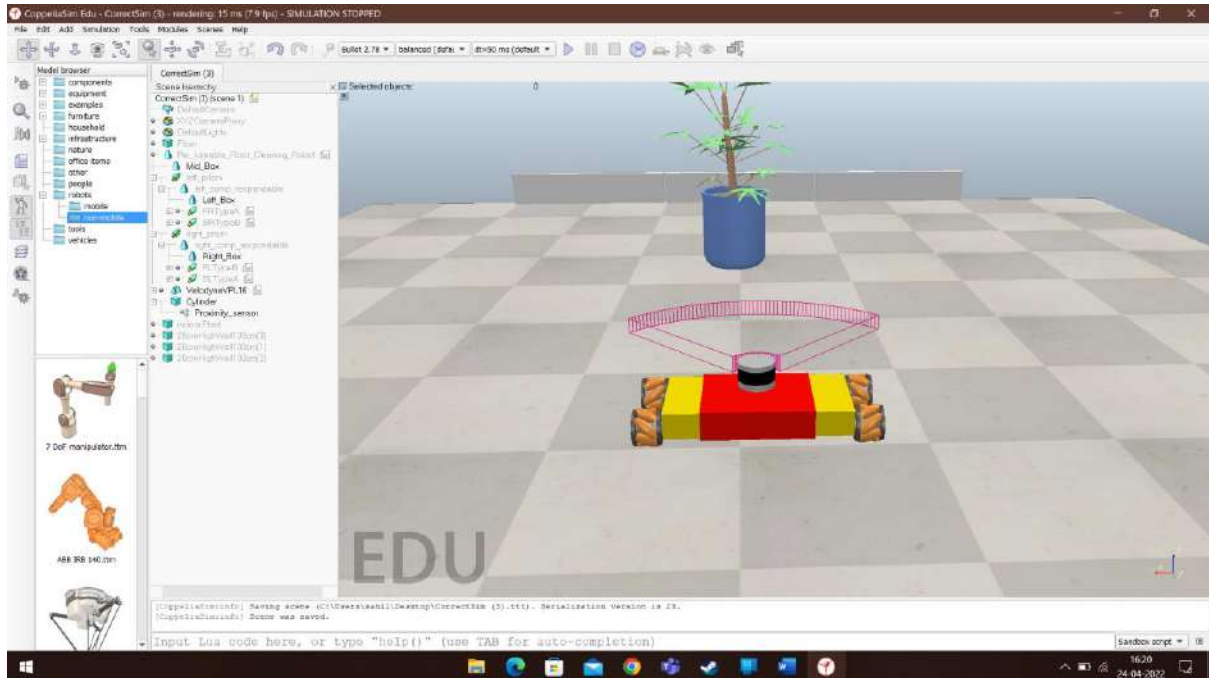


Fig. 3.2 Length Actuation (Simulation): Fully Extended (Top) and Fully Retracted (Bottom)

Fig 3.2 demonstrates the actuation mechanism that changes the size of the robot. It basically consists of two prismatic joints on either side.

3.2 FUNCTIONAL PROTOTYPE

A functional prototype has been developed to demonstrate the performance of the system in the real world. The design was modified to simplify the model and reduce costs at the same time, ensuring that the critical components and concepts of the robot are not affected.

The chassis has been designed using Mild Steel sheets. MS sheet was chosen because of its relatively low cost, high strength and easy availability and machinability. Two ultrasonic sensors have been used for obstacle detection.

Table 3.1 Properties of MS

Properties	Values
Young's Modulus	200 GPa
Poission's ratio	0.31
Density	7750 Kg/m ³
Tensile Yield Strength	320 MPa
Tensile Ultimate Strength	400 MPa

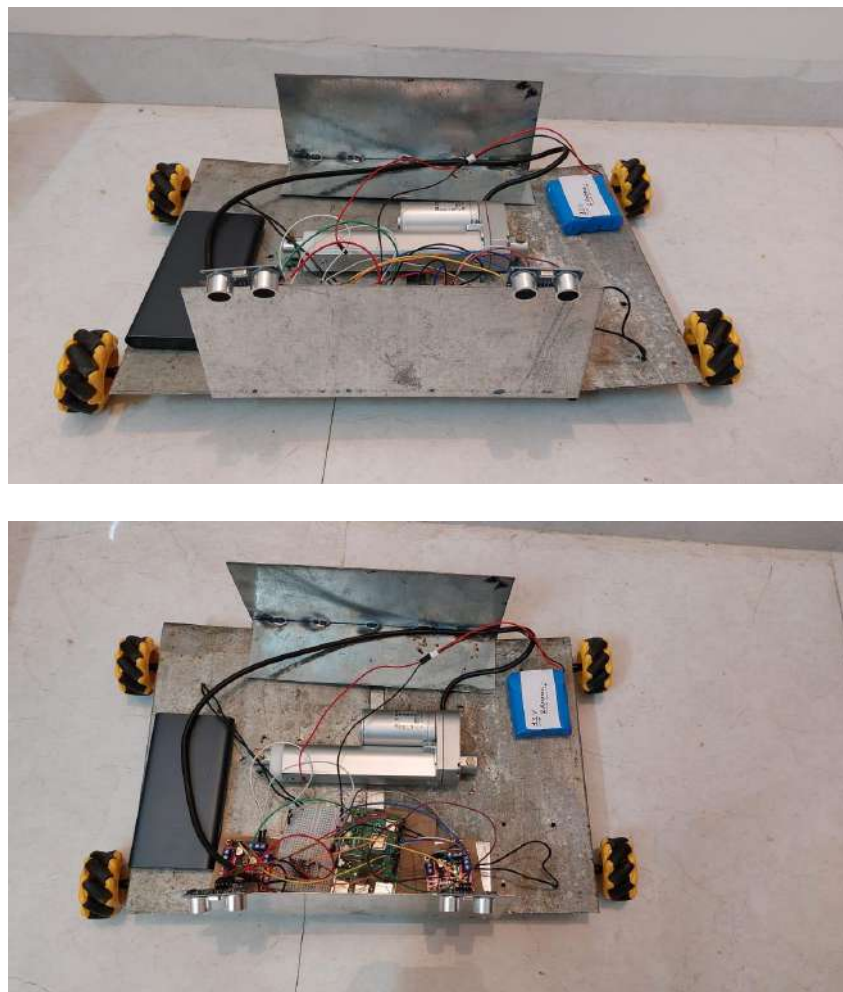


Fig. 3.3 Functional Prototype (Fully Retracted)

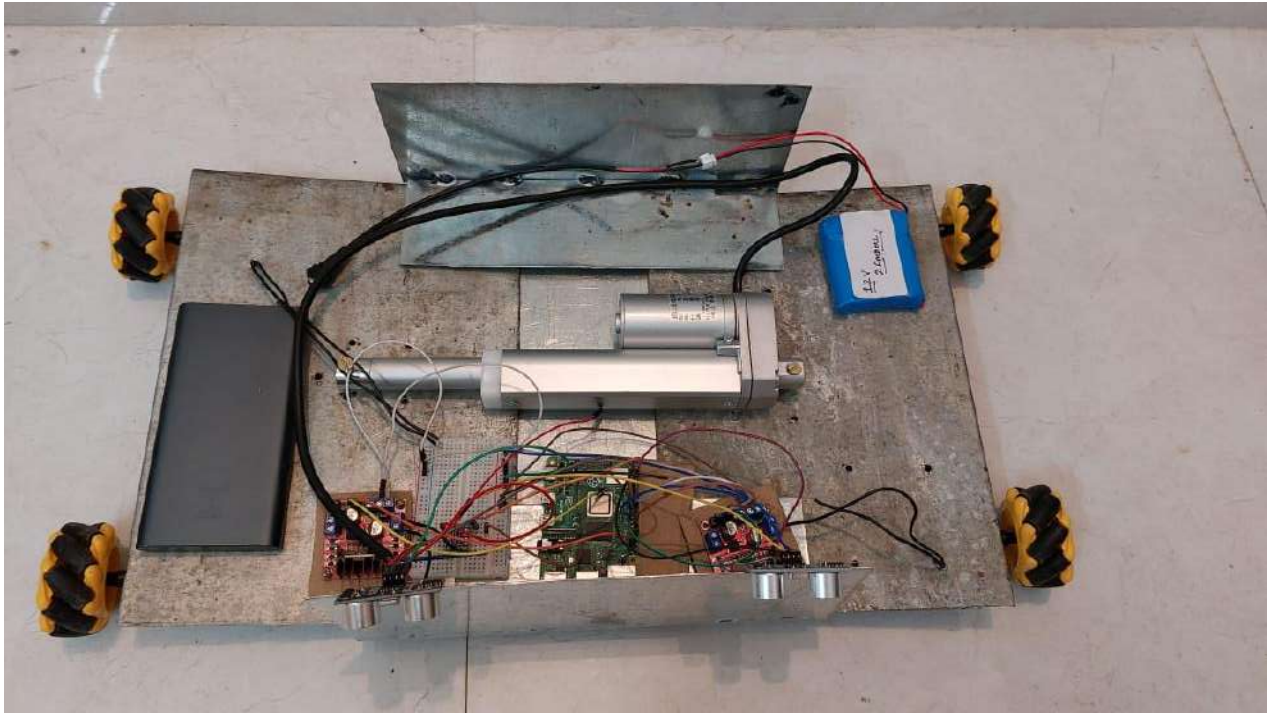


Fig. 3.4 Functional Prototype (Fully Extended)

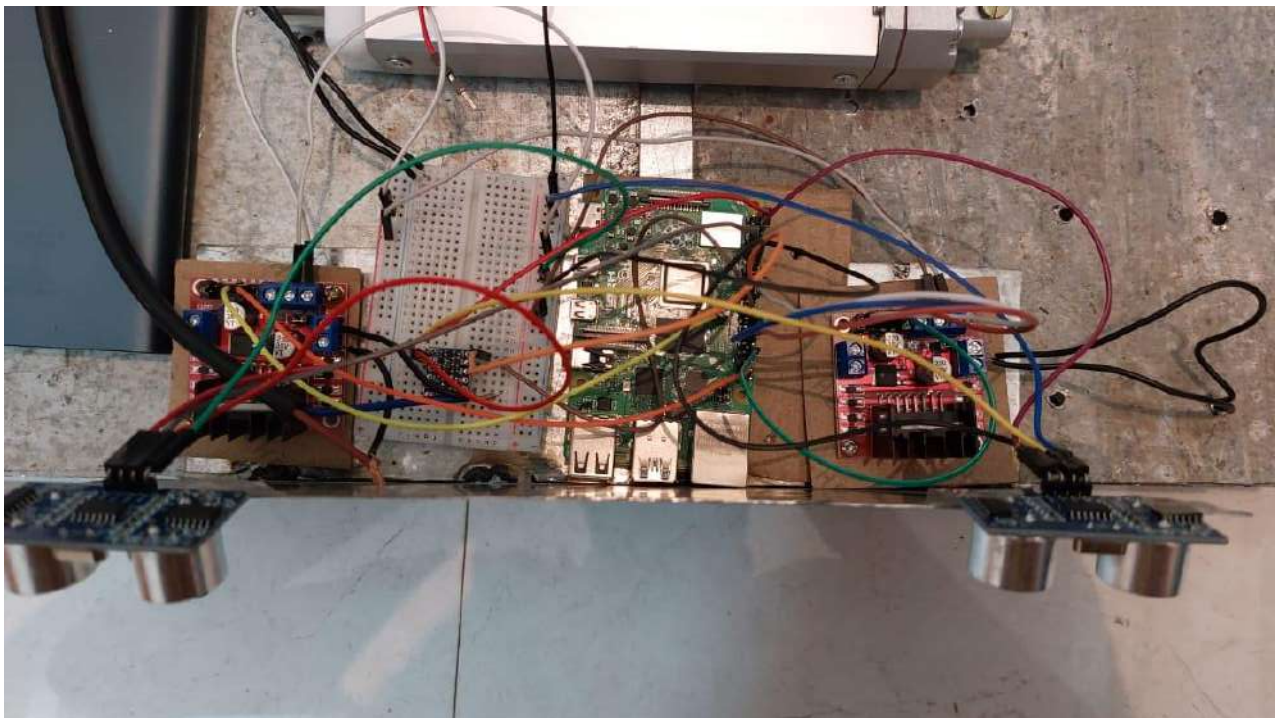


Fig. 3.5 Functional Prototype (Circuit)

The components include a linear actuator, two motor drivers, four motors and Mecanum Wheels, two Ultrasonic sensors, a Raspberry Pi 4, a bread board, a 5V battery and a 12V battery.

3.3 STRESS ANALYSIS

A static stress analysis has been conducted on the MS sheet used to make the chassis of the robot. The applied load is 20N. Two studies have been created - one when the robot is fully retracted, and another when it is fully extended.

The analysis results show that the Factor of Safety is 15, hence the chassis will not fail. The maximum displacement is 0.3745 mm, which is at the middle box chassis. Further, the maximum stress induced is 14.75 MPa.

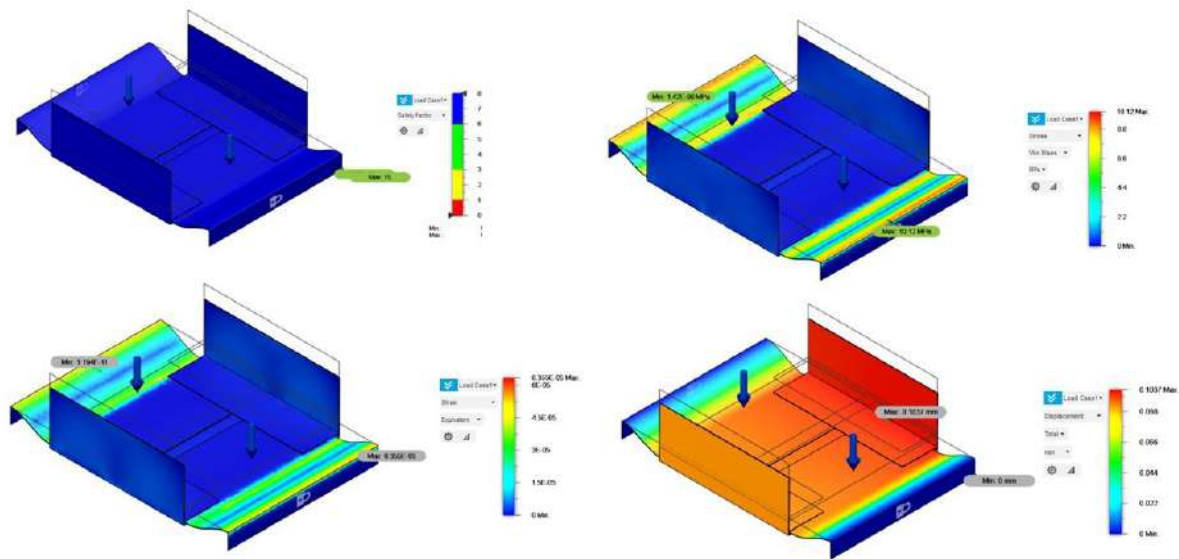


Fig. 3.6 Stress Analysis (Fully Retracted)

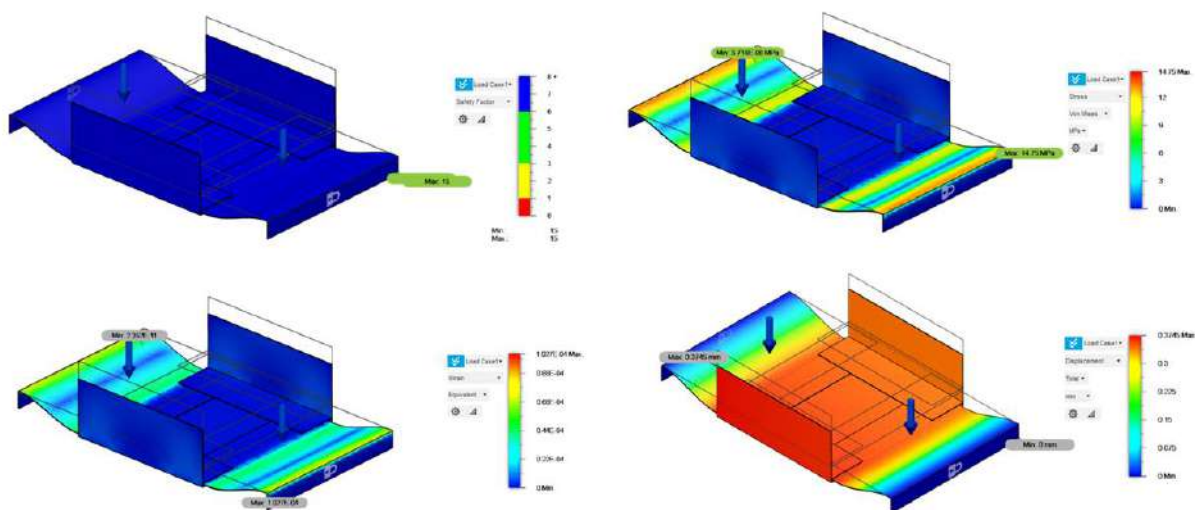


Fig. 3.7 Stress Analysis (Fully Extended)

CHAPTER 4

CONCLUSIONS

A simulation study has been demonstrated to verify the efficacy of the system. Further, a functional prototype has been developed as a proof of concept to test the system in the real world. A static stress analysis has been conducted to determine the factor of safety of the chassis, which is the main load bearing element of the robot. Since the chassis is made of MS sheet, the weight of components will introduce stresses and bending. The stress analysis as well as the model developed prove that bending and subsequent failure are not a problem. Future work will involve integrating SLAM using LIDAR, for more efficient and systematic cleaning.

A Simulation environment has extremely ideal conditions, and there are no stresses induced on the robot. However, in the real world, there are several factors such as weight of components and friction that affect the performance of the robot. As a result, several iterations were required to attain a chassis that was performing well. Earlier iterations of the functional prototype suffered from bending of the chassis and loss of traction to the wheels. Having identified the problem areas, necessary modifications were made to the chassis to ensure compliance. After several iterations, a chassis was finally developed that functioned well. Such complications are not faced in a Simulation study, hence developing a functional prototype is of utmost importance, and has its own set of challenges.

A static stress analysis has been conducted on the MS sheet used to make the chassis of the robot. The applied load is 20N. Two studies have been created - one when the robot is fully retracted, and another when it is fully extended.

The analysis results show that the Factor of Safety is 15, hence the chassis will not fail. The maximum displacement is 0.3745 mm, which is at the middle box chassis. Further, the maximum stress induced is 14.75 MPa.

After exhaustive testing and checking for the efficacy of the cleaning robot, it has been concluded that the robot is economically viable and feasible and its design flexibility make it a value for money product if properly commercialized.

References:

- [1] E. Prassler, A. Ritter, C. Schaeffer and P. Fiorini, "A Short History of Cleaning Robots," *Autonomous Robots*, vol. 9, pp. 211-226, December 2000.
- [2] H. Endres, W. Feiten and G. Lawitzky, "Field Test of a Navigation System: Autonomous Cleaning in Supermarkets," *IEEE International Conference on Robotics and Automation*, 06 August 2002.
- [3] N. Kushal, H. Chaudhuri and H. Nikithesh, "Autonomous Floor Cleaning Bot," *International Research Journal of Engineering and Technology (IRJET)*, vol. 5, no. 6, June 2018.
- [4] S. Kim, "Autonomous Cleaning Robot: Roboking System Integration and Overview," *IEEE International Conference on Robotics and Automation*, 07 June 2004.
- [5] Y. Liu, S. Zhu, B. Jin, S. Feng and H. Gong, "Sensory Navigation of Autonomous Cleaning Robots," *Fifth World Congress on Intelligent Control and Automation*, 18 October 2004.
- [6] K. Hasan, A. Nahid and K. Reza, "Path Planning Algorithm Development for Autonomous Vacuum Cleaner Robots," *2014 International Conference on Informatics, Electronics & Vision (ICIEV)*, May 2014.
- [7] A. Joon and W. Kowalczyk, "Design of Autonomous Mobile Robot for Cleaning in the Environment with Obstacles," *Applied Science 2021*, vol. 11, no. 17, p. 8076, 31 August 2021.
- [8] S. Hossen, R. Shaharear, F. Islam, S. Islam, N. Hossain and S. Datta, "Designing and Optimization of An Autonomous Vacuum Floor Cleaning Robot," in *2019 IEEE International Conference on Robotics, Automation, Artificial-intelligence and Internet-of-Things (RAAICON)*, November 2019.
- [9] L. Gerstmayr-Hillen, F. Röben and M. Krzykowski, "Dense Topological Maps and Partial Pose Estimation for Visual Control of An Autonomous Cleaning Robot," *Robotics and Autonomous Systems*, vol. 61, no. 5, May 2013.
- [10] K. Karur, N. Sharma, C. Dharmatti and J. Siegel, "A Survey of Path Planning Algorithms for Mobile Robots," *Electrified Intelligent Transportation Systems*, vol. 3, no. 3, pp. 448-468, 04 August 2021.
- [11] M. Dakulović, S. Horvatić and I. Petrović, "Complete Coverage D* Algorithm for Path Planning of a Floor-Cleaning Mobile Robot," *IFAC Proceedings Volumes*, vol. 44, no. 1, pp. 5950-5955, January 2011.

- [12] C. Lamini, S. Benhlilima and A. Elbekri, "Genetic Algorithm Based Approach for Autonomous Mobile Robot Path Planning," *Procedia Computer Science*, vol. 127, pp. 180-189, 2018.
- [13] M. Yakoubi and M. Laskri, "The Path Planning of Cleaner Robot for Coverage Region Using Genetic Algorithms," *Journal of Innovation in Digital Ecosystems*, vol. 3, no. 1, pp. 37-43, June 2016.
- [14] Y. Liu, X. Lin and S. Zhu, "Combined Coverage Path Planning for Autonomous Cleaning Robots in Unstructured Environments," *2008 7th World Congress on Intelligent Control and Automation*, 08 August 2008.
- [15] C. Hofner and G. Schmidt, "Path Planning and Guidance Techniques for An Autonomous Mobile Cleaning Robot," *Robotics and Autonomous Systems*, vol. 14, no. 2-3, pp. 199-212, May 1995.
- [16] B. Ramalingam, A. Lakshmanan, M. Ilyas, A. Le and M. Elara, "Cascaded Machine-Learning Technique for Debris Classification in Floor-Cleaning Robot Application," *Applied Science 2018*, vol. 8, no. 12, p. 2649, 17 December 2018.
- [17] G. Schmidt and C. Hofner, "An Advanced Planning and Navigation Approach for Autonomous Cleaning Robot Operations," *International Conference on Intelligent Robots and Systems*, 06 August 2002.
- [18] R. Parween, M. Heredia, M. Rayguru and R. Abdulkader, "Autonomous Self-Reconfigurable Floor Cleaning Robot," *IEEE*, pp. 114433-114442, 01 June 2020.
- [19] R. Parween, V. Prabakaran, M. Elara and A. Vengadesh, "Application of Tiling Theory for Path Planning Strategy in a Polyiamond Inspired Reconfigurable Robot," *IEEE*, pp. 6947-6957, 18 December 2018.
- [20] J. Forlizzi and C. DiSalvo, "Service Robots in The Domestic Environment: A Study of The Roomba Vacuum in The Home," *HRI 06': Proceedings of the 1st ACM SIGCHI/SIGART Conference on Human-Robot Interaction*, pp. 258-265, 02 March 2006.
- [21] P. Eng, B. Laurean and D. Telea, "Management and Motion Control of Ball Screw Actuators Applied in the Robotic Structures," *Control Systems Engineering*, June 2012.
- [22] S. Bhowmick, R. Adhikari and S. Dutta, "Practical Applications for Mobile Robots based on Mecanum Wheels - A Systematic Survey," *IJIREICE*, vol. 6, no. 12, pp. 20-24, December 2018.
- [23] M. Zhao, H. Lu, S. Yang, Y. Guo and F. Guo, "A Fast Robot Path Planning Algorithm Based on Bidirectional Associative Learning," *Computers & Industrial Engineering*, vol. 155, p. 107173.
- [24] A. Lakshmanan, R. Mohan, B. Ramalingam, A. Le, P. Veerajagadeshwar, K. Tiwari and M. Ilyas, "Complete Coverage Path Planning Using Reinforcement Learning for

- Tetromino Based Cleaning and Maintenance Robot,” *Automation in Construction*, vol. 122, p. 103078, April 2020.
- [25] Z. Yan, S. Schreiberhuber, G. Halmetschlager, T. Duckett, M. Vincze and N. Bellotto, “Robot Perception of Static and Dynamic Objects with An Autonomous Floor Scrubber,” *Intelligent Service Robotics*, pp. 403-417, 08 June 2020.
- [26] H. Wang, Y. Yu and Q. Yuan, “Application Of Dijkstra Algorithm in Robot Path-Planning,” *IEEE*, 18 August 2011.
- [27] L. Yang, J. Qi, D. Song, J. Xiao, J. Han and Y. Xia, “Survey of Robot 3D Path Planning Algorithms,” *Journal of Control Science and Engineering*, vol. 2016, no. Article ID 7426913, 04 July 2016.
- [28] M. Elara, N. Rojas and A. Chua, “Design Principles for Robot Inclusive Spaces: A Case Study with Roomba,” *IEEE*, 29 September 2014.
- [29] J. Jones, “Robots At the Tipping Point: The Road to iRobot Roomba,” *IEEE*, pp. 76-78, 2006 February 2006.
- [30] Gross and Jennifer, “Interviewing Roomba: A Posthuman Study of Humans and Robot Vacuum Cleaners,” *Explorations in Media Ecology*, vol. 19, no. 3, pp. 285-297, 01 September 2020.
- [31] B. Tribelhorn and Z. Dodds, “Evaluating The Roomba: A Low-Cost, Ubiquitous Platform for Robotics Research and Education,” *IEEE*, 21 May 2007.
- [32] Bergman and Joel, “Robot Vacuum Cleaner,” *School of Industrial Engineering and Management (ITM)*, p. 70, 2019.
- [33] T. Asafa, T. Afonja, E. Olaniyan and H. Alade, “Development of a Vacuum Cleaner Robot,” *Alexandria Engineering Journal*, vol. 57, no. 4, pp. 2911-2920.
- [34] Z. Zhang and Z. Zhao, “A Multiple Mobile Robots Path Planning Algorithm Based on A-Star and Dijkstra Algorithm,” *International Journal of Smart Home*, vol. 8, no. 3, pp. 75-86, May 2014.
- [35] N. Buniyamin, W. Ngah, N. Sariff and Z. Mohamad, “A Simple Local Path Planning Algorithm for Autonomous Mobile Robots,” *Control Systems Engineering*, January 2011.
- [36] M. Elara, N. Rojas and A. Chua, “Design Principles for Robot Inclusive Spaces: A Case Study with Roomba,” *2014 IEEE International Conference on Robotics and Automation (ICRA)*, 29 September 2014.
- [37] P. Adithya, R. Tejas, S. Varun and B. Prashanth, “Design and Development of Automatic Cleaning and Mopping Robot,” *IOP Conference Series: Materials Science and Engineering*, vol. 577, no. 012126, 16 August 2018.

- [38] M. Ilyas, S. Yuyao, R. Mohan, M. Devarassu and M. Kalimuthu, “Design of sTetro: A Modular, Reconfigurable, and Autonomous Staircase Cleaning Robot,” *Journal of Sensors*, vol. 2018, no. Article ID 8190802, 24 July 2018.
- [39] T. Ichimura and S.-i. Nakajima, “Development of an autonomous beach cleaning robot “Hirottaro”,” *2016 IEEE International Conference on Mechatronics and Automation*, 05 September 2016.
- [40] V. N. Shah, Sathvik and A. Vaghela, “Floor Cleaning Robot (Autonomus/Manual),” *International Journal of Engineering Research & Technology (IJERT)*, no. 2016.
- [41] V. Silva, J. Roche and A. Kondo, “Robust Fusion of LiDAR and Wide-Angle Camera Data for Autonomous Mobile Robots,” *Sensors 2018, Depth Sensors and 3D Vision*, vol. 18, no. 8, p. 2730, 20 August 2018.
- [42] C. E. O. Lima and S. Sano, “Design and Analysis of a New Type of Mecanum Wheel,” in *Proceedings of 175th IASTEM International Conference – Tokyo, Japan*, April 2019.

PUBLICATION COMMUNICATION

The idea for a research paper has been communicated to a journal. The response is pending.

PLAGIARISM REPORT

re-sizeable autonomous cleaning robot

by Sahil Chaudhary

Submission date: 26-Apr-2022 03:06PM (UTC+0530)

Submission ID: 1820749807

File name: 21BTECH10424_R-3_Report.docx (18.18M)

Word count: 7256

Character count: 36877

re-sizeable autonomous cleaning robot

ORIGINALITY REPORT

8%

SIMILARITY INDEX

5%

INTERNET SOURCES

4%

PUBLICATIONS

2%

STUDENT PAPERS

PRIMARY SOURCES

1

[robu.in](https://www.robu.in)

Internet Source

2%

2

Rizuwana Parween, Manuel Vega Heredia, Madan Mohan Rayguru, Raihan Enjikalayil Abdulkader, Mohan Rajesh Elara. "Autonomous Self-Reconfigurable Floor Cleaning Robot", IEEE Access, 2020

Publication

1%

3

www.iqsdirectory.com

Internet Source

1%

4

Kazi Mahmud Hasan, Abdullah-Al-Nahid, Khondker Jahid Reza. "Path planning algorithm development for autonomous vacuum cleaner robots", 2014 International Conference on Informatics, Electronics & Vision (ICIEV), 2014

Publication

1%

5

relionbattery.com

Internet Source

<1%

6

www.prayogindia.in

Internet Source

<1%

7	Yu Liu, Xiaoyong Lin, Shiqiang Zhu. "Combined coverage path planning for autonomous cleaning robots in unstructured environments", 2008 7th World Congress on Intelligent Control and Automation, 2008 Publication	<1 %
8	Stewart Watkiss. "Learn Electronics with Raspberry Pi", Springer Science and Business Media LLC, 2016 Publication	<1 %
9	Rahul Mapari, Kishor Bhangale, Laukik Deshmukh, Prashant Gode, Ankit Gaikwad. "Chapter 40 Agriculture Protection from Animals Using Smart Scarecrow System", Springer Science and Business Media LLC, 2022 Publication	<1 %
10	my.cytron.io Internet Source	<1 %
11	componentstree.com Internet Source	<1 %
12	Submitted to University of Edinburgh Student Paper	<1 %
13	Submitted to Yanbu Industrial College Student Paper	<1 %

14	J. Lee, A. S. Ab Ghafar, N. Mohd Nordin, F. A. Saparudin, N. Katiran. "Autonomous multi-function floor cleaning robot with zig zag algorithm", Indonesian Journal of Electrical Engineering and Computer Science, 2019 Publication	<1 %
15	Submitted to Liverpool John Moores University Student Paper	<1 %
16	Submitted to Utah Education Network Student Paper	<1 %
17	napier-surface.worktribe.com Internet Source	<1 %
18	"Computers Helping People with Special Needs", Springer Science and Business Media LLC, 2020 Publication	<1 %
19	dspace.lboro.ac.uk Internet Source	<1 %
20	dutch.alibaba.com Internet Source	<1 %
21	www.amazon.com.au Internet Source	<1 %

Exclude quotes ☐ On

Exclude matches

< 10 words

Exclude bibliography ☐ On

CONTRIBUTION STATEMENT

The project has been executed by a team of three. Their contributions are as follows:

- **Sahil T Chaudhary (18BME0668):** Development of Functional Prototype, Circuit Design, Selection of components, Sensor Coding
- **Kahaan Patel (18BME0691):** Development of CAD Model, Literature Review, Stress Analysis, Development of Functional Architecture
- **Mehul Chaurasia (18BME0640):** Simulation Study, Mathematical Design Calculations, Literature Review, Selection of components

Verified by

A handwritten signature in black ink, appearing to read 'Helina', with a long horizontal stroke extending to the right.

(Signature of the Guide)

PROGRAMME OUTCOMES ATTAINED

Programme Outcomes	Attainment Level
PO_1: Engineering Knowledge: Apply the knowledge of mathematics, science, engineering fundamentals, and an engineering specialization to the solution of complex engineering problems.	MEDIUM
PO_2: Problem Analysis: Identity, formulate, review research literature, and analyse complex engineering problems reaching substantiated conclusions using first principles of mathematics, natural sciences, and engineering sciences.	HIGH
PO_3: Design/Development of Solutions: Design solutions for complex engineering problems and design system components or processes that meet the specified needs with appropriate consideration for public health and safety, and cultural, societal, and environmental considerations.	MEDIUM
PO_4: Conduct Investigations of Complex Problems: Use research-based knowledge and research methods including design of experiments, analysis, and interpretation of data, and synthesis of the information to provide valid conclusions for complex problems.	MEDIUM
PO_5: Modern Tool Usage: Create, select, and apply appropriate techniques, resources, and modern engineering and IT tools including prediction and modeling to complex engineering activities with an understanding of the limitations.	HIGH
PO_6: The Engineer and Society: Apply reasoning informed by the contextual knowledge to assess societal, health, safety, legal and cultural issues and the consequent responsibilities relevant to the professional engineering practice.	MEDIUM
PO_7: Environment and Sustainability: Understand the impact of the professional engineering solutions in societal and environmental contexts, and demonstrate the knowledge of, and need for sustainable development.	NOT ATTAINED

PO_8: Ethics: Apply ethical principles and commit to professional ethics and responsibilities and norms of the engineering practice.	LOW
PO_9: Individual and Teamwork: Function effectively as an individual, and as a member or leader in diverse teams, and in multidisciplinary settings.	HIGH
PO_10: Communication: Communicate effectively on complex engineering activities with the engineering community and with society at large, such as, being able to comprehend and write effective reports and design documentation, make effective presentations, and give and receive clear instructions.	MEDIUM
PO_11: Project Management and Finance: Demonstrate knowledge and understanding of the engineering and management principles and apply these to one's own work, as a member and leader in a team, to manage projects and in multidisciplinary environments.	HIGH
PO_12: Life-long Learning: Recognize the need for and have the preparation and ability to engage in independent and lifelong learning in the broadest context of technological change.	HIGH

Verified by



(Signature of the Guide)